


# PRESTO-LOCK GOLD COPING

**TAPERED** 

MIAMI-DADE COUNTY

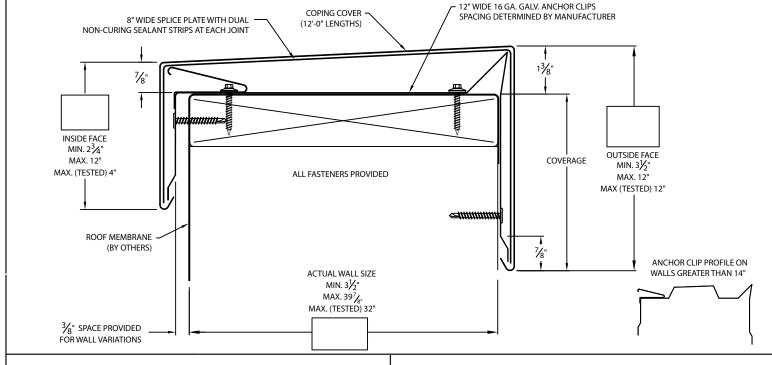

## **APPROVALS\***

ANSI/SPRI/FM 4435/ES-1 Test Pressures listed in notes



## MATERIAL\*

- ☐ 24 Ga. Galv. Steel☐ 22 Ga. Galv. Steel☐
- 22 Ga. Galv. Steel
- □.040" Aluminum
- ☐ .050" Aluminum ☐ .063" Aluminum
- OTHER:
- Color: \_\_\_\_\_
- Finish:
- Substrate: (For Top Fasteners)
- If substrate is not given, wood fasteners will be provided. Wood Masonry
  - ☐ Metal

## **QUANTITIES**

\_\_\_\_\_ Lineal Feet (12'-0" Lengths)

Outside Miter (90°)

Inside Miter (90°)

\_\_\_\_\_ Right Endcaps

\_\_ Left Endcaps

Accessory Type*:	Quicklock (	(Default)	☐ Welded (	(Surcharge)

\_\_\_\_\_ Right Endwall Flashing (Coping Version)

Left Endwall Flashing (Coping Version)

Right Endwall Flashing (Splice Plate Version)

\_\_\_\_\_ Left Endwall Flashing (Splice Plate Version)

#### \* NOTES

- Oil canning can occur on larger face heights and wall widths; recommend 22 Ga.,.050" or .063" Aluminum for face height over 8" or wall width over 12".
- 24 ga. Galv and .040" Aluminum coping covers available for wall sizes of 3.5" to 24" ONLY
- Unless otherwise noted, fabrication of miters and accessories are furnished standard utilizing a non-penetrating quicklock joint, then factory sealed watertight.
- Welded accessories require a minimum material thickness of .050" Aluminum
- For non-90 miters, see separate print approval
- Product should be installed per provided installation instructions
- ANSI/SPRI/FM 4435/ES-1 test pressures up to 297 psf (Horizontal) and 513 psf (Vertical)

PR	$\mathbf{O}$	IF C	T:	N	FO
	$\mathbf{v}$	$\sim$	, , ,	1.4	$\cdot$

Project Name:
Architect:
Roofing Contractor:

#### Project Type:

By selecting this box yo confirmed that dimensionare correct. All products will be installed in strict accordance with			
	SHT#_	1	of_2

Johns Manville	
Date:	DR

EdgeMetal@jm.com
Main JM Switchboard USA:
303-978-2000
Technical: 800-922-5922 Option 3
Account Specialists: 877-766-3295
General Product Information
Center: 800-654-3103

DATE:	12/9/22
DRN BY:	JJC

CKD BY: MM


DWG #: 16011-33124


REV: C



# PRESTO-LOCK GOLD COPING


STANDARD ACCESSORIES

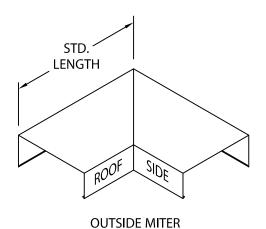

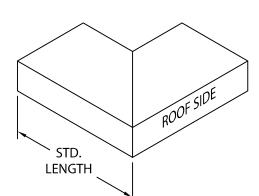





MITER STANDARD LEG LENGTH:
WALL SIZE + 10<sup>1/8</sup>" = LENGTH



ENDCAP (LEFT HAND SHOWN)



ENDWALL FLASHING COPING VERSION (RIGHT HAND SHOWN)



ENDWALL FLASHING
SPLICE PLATE VERSION
(RIGHT HAND SHOWN)
(AVAILABLE ONLY IN
.040" WELDED, PAINTED
TO MATCH COPING)

### **NOTES**

Additional accessories are available including:

- Transition Miters
- Straight Transition Miters
- "T" Miters
- "Z" Miters
- Step-up Miters
- Peak / Valley Miters
- Pilaster Caps
- Radius Coping
- Arched Coping

For additional accessory requirements, attach sketches or call manufacturer for assistance.

#### Johns Manville

EdgeMetal@jm.com Main JM Switchboard USA: 303-978-2000 Technical: 800-922-5922 Option 3 Account Specialists: 877-766-3295 General Product Information Center: 800-654-3103 SHT# \_2 of \_2

DATE: \_\_\_12/9/22

DRN BY: \_\_\_JJC

CKD BY: \_\_\_MM

DWG #: \_\_\_16011-33124