



FLEXLOCK FLS RADIUS ROOF EDGE

FULLY ADHERED OR MECHANICALLY ATTACHED SINGLE-PLY VERSION

IMPORTANT! MUST INDICATE PROPER RADIUS CONDITION BY CIRCLING APPROPRIATE OUTSIDE FACE

PROVIDING A RADIUS
THE RADIUS MAY BE PROVIDED
IN ONE OF TWO METHODS:


1.) THE ACTUAL KNOWN RADIUS IS

' FEET " INCHES
 MINIMUM OF 13'-0"
(CALL IF LESS)

OR


2.) FIELD CONDITION MEASUREMENTS

NOTE: REFER TO ATTACHED WORKSHEET
FOR FURTHER INFORMATION

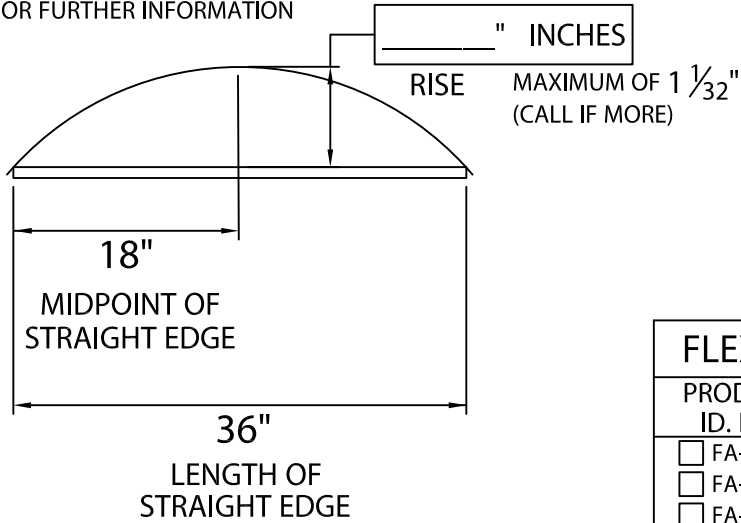

NOTE: CHECK MEASUREMENTS ALONG ENTIRE RADIUS.

DETAIL A

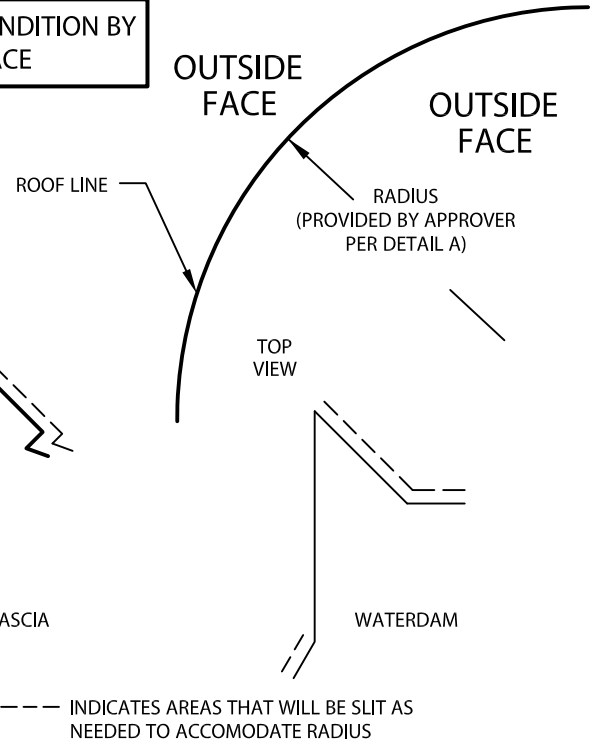

FLEXLOCK FLS RADIUS ROOF EDGE DIMENSIONS

PRODUCT ID. NO.	H DIM	X DIM	NAILER COVERAGE
<input type="checkbox"/> FA-50	5 1/4"	2 7/8"	1 NAILER
<input type="checkbox"/> FA-65	6 3/4"	4 3/8"	2 NAILERS
<input type="checkbox"/> FA-80	8 1/4"	5 7/8"	3 NAILERS
<input type="checkbox"/> FA-95	9 3/4"	7 3/8"	4 NAILERS
<input type="checkbox"/> FA-110	11 1/4"	8 7/8"	5 NAILERS
<input type="checkbox"/> FA-125	12 3/4"	10 3/8"	6 NAILERS

Fabrication will proceed only after receipt of signed print approval.

Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with Flex's printed instructions.

Approved by: _____

Date: _____

MATERIAL:

_____ 24 GA. GALV. STEEL*
 OIL CANING CAN OCCUR ON LARGER FACE HEIGHTS. RECOMMEND _____ .040" ALUMINUM
 _____ .050" ALUMINUM
 _____ .063" ALUMINUM
 _____ OTHER: _____

COLOR: _____

FINISH: _____

QUANTITIES:

_____ LINEAL FEET 12'-0" LENGTHS

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

Customer Service:

Phone: 800-969-0108

Fax: 610-916-9501



DATE: 03/04/19

DRN BY: ZS

CKD BY: SAK

SHT.# _____ OF _____

DWG# 28010-11353

H