



NON 90° COPING MITERS

OUTSIDE MITER - OBTUSE

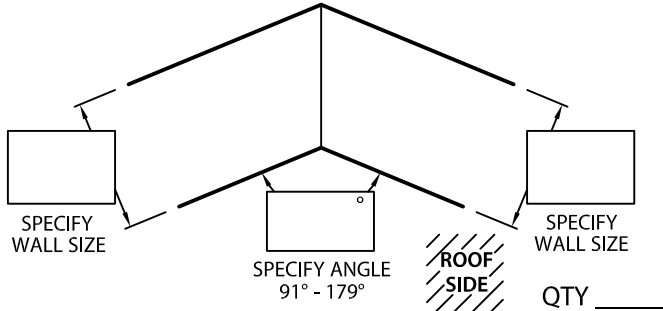


OUTSIDE MITER - ACUTE

INTERNAL USE

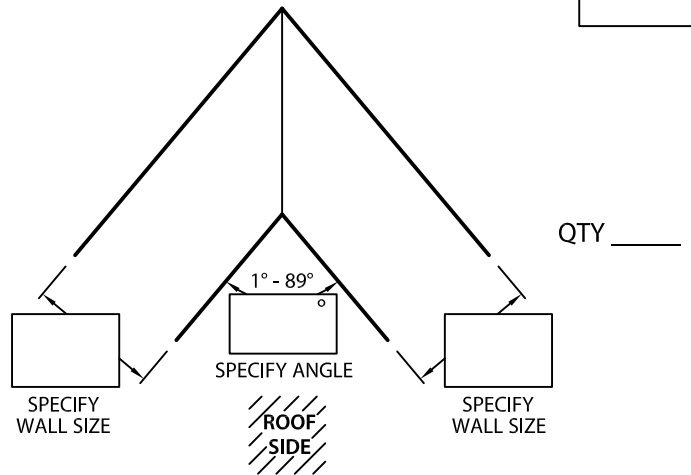


INSIDE MITER - OBTUSE

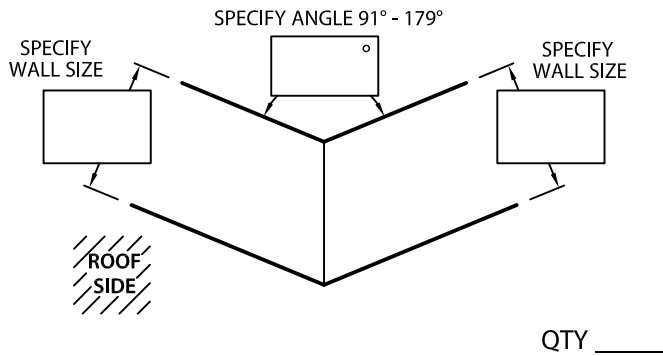

INSIDE MITER - ACUTE

INTERNAL USE

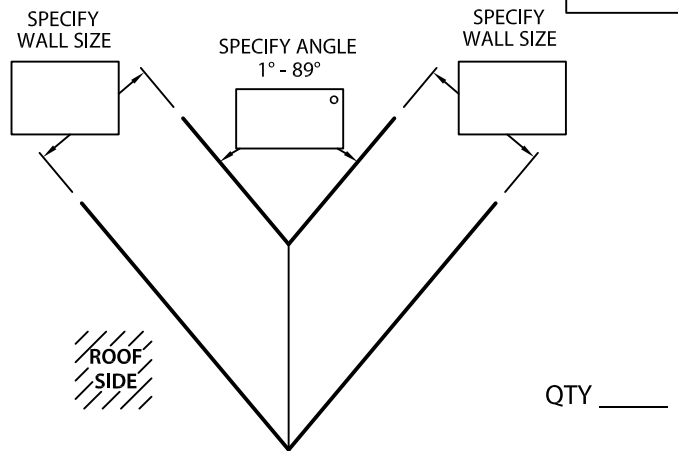

NOTES:

--- FOR CUSTOM LEG LENGTHS MODIFY DRAWING ABOVE.

- ① WELDED ACCESSORIES REQUIRE A MINIMUM MATERIAL THICKNESS OF .050".

MATERIAL:

- 24 GA. GALVANIZED STEEL
 22 GA. GALVANIZED STEEL
 .040" ALUMINUM
 .050" ALUMINUM
 .063" ALUMINUM
 OTHER _____

SPECIFY ACCESSORY TYPE:

- WELDED ①
 QUICKLOCK

AUTHORIZED SIGNATURE:

APPROVED BY: _____

DATE: _____

COLOR: _____

FINISH: _____

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:



DATE: 08/15/19

DRN BY: JJC

CKD BY: JAI

SHT.# _____ OF _____


DWG# 61011-32076

A



NON 90° COPING MITERS

RIGHT ANGLES ARE 90°
ACUTE ANGLES RANGE FROM 1° - 89°
OBTUSE ANGLES RANGE FROM 91° - 179°

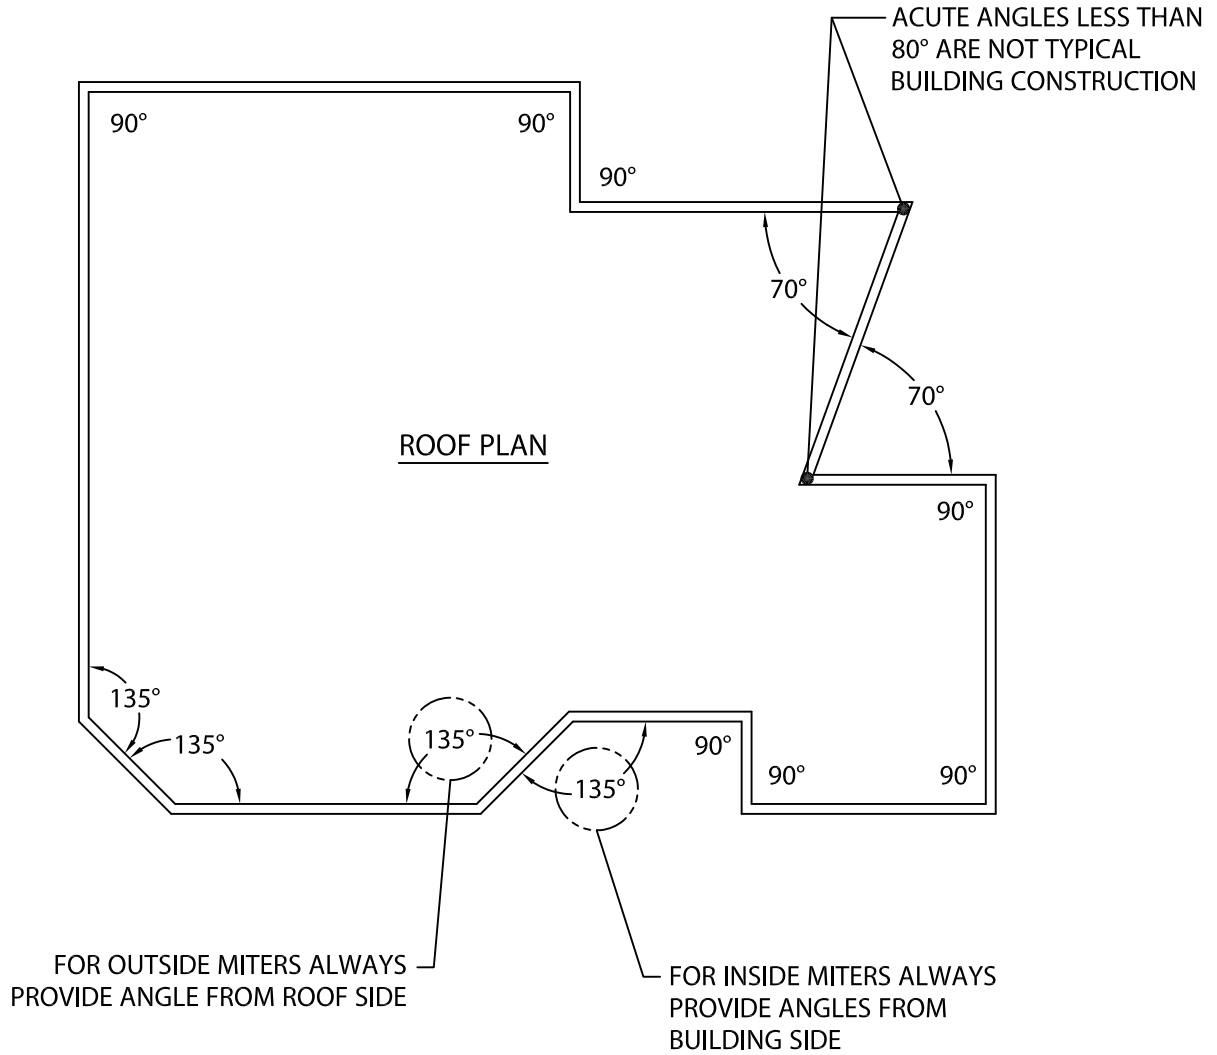

	DATE: 08/15/19	SHT.# ___ OF ___
	DRN BY: JJC	
	CKD BY: JAI	DWG# 61011-32076 A