

REPRESENTATIVE/DISTRIBUTOR:

**CUSTOMER SERVICE** 

FAX: 610-916-9501

PHONE: 800-969-0108



## FLEXLOCK FLS ROOF EDGE

FULLY ADHERD OR MECHANICALLY ATTACHED SINGLE-PLY VERSION

DATE: 09/30/16


DRN BY: JJC

CKD BY: SAK

SHT.#\_\_\_ OF \_

DWG# 28010-21551

D

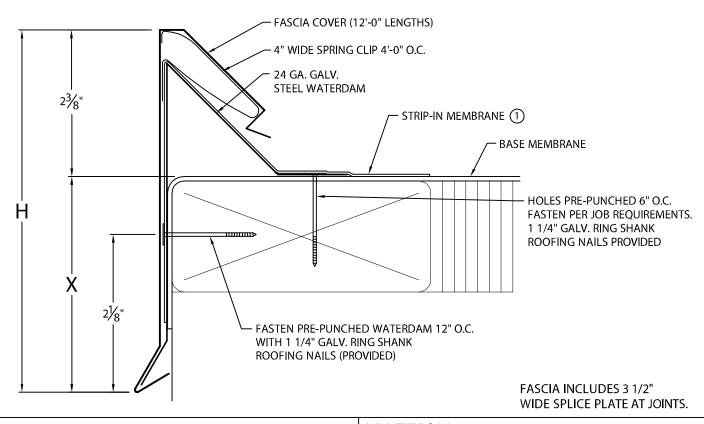

(1) STANDARD FASCIA WILL NOT FUNCTION WITH TPO OR PVC STRIP-IN MEMBRANE THICKER THAN .060".					MATERIAL:		
OIL CANNING CAN OCCUR ON LARGER FACE HEIGHTS. RECOMMEND .050" OR .063" FOR FACE HEIGHTS ABOVE 81/4"      WELDED ACCESSORIES REQUIRE A MINIMUM OF MATERIAL THICKNESS OF .050"					24 GA. GA 040" ALU	LV. STEEL ② MINUM ②	050" ALUMINUM 063" ALUMINUM
NOTE: – UNLESS OTHERWISE NOTED, FABRICATION OF MITERS AND ACCESSORIES ARE FURNISHED STANDARD.  FLEXLOCK FLS ROOF EDGE DIMENSIONS					COLOR:FINISH:		
PRODUCT ID. NO.  FA-50 FA-65 FA-80 FA-95 FA-110 FA-125  ANSI/SPRI/FM DESIGN PRESS	H DIM 5 1/4" 6 3/4" 8 1/4" 9 3/4" 11 1/4" 12 3/4"  FA-50 TO SURE FA-50 TO		X DIM 2 7/8" 4 3/8" 5 7/8" 7 3/8" 8 7/8" 10 3/8" 0 FA-80 IN 24 GA. OR 0 FA-80 IN .050 OR .00	63" - 216 psf	QUANTITIES: LINEAL FEET 12'-0" LENOUTSIDE MITER(S) @ 90° INSIDE MITER(S) @ 90° RIGHT ENDCAP(S) LEFT HANDCAP(S) RIGHT ENDWALL FLASHING(OVERFLOW SCUPPER(S)	SPECIFY ACCESSORY TYPE:  WELDED ③ STANDARD  (S)  TYLEAB	
AUTHORIZED SIGNATURE:  APPROVED BY:  DATE:					SPILLOUT SCUPPER(S) STYLEAB DOWNSPOUT SCUPPER(S) STYLEAB (X) SIZE A: TAPERED 1 1/2" DROP B: FLAT FOR NON-90 MITERS SEE PRINT APPROVAL #28010-3536		
PROJECT:							
ARCHITECT:							
ROOFING CONTRACTOR:							