


# POLYFORZA STANDARD FASCIA

BUILT-UP OR MODIFIED VERSION

## NOTES

- For non-90 miters, see separate print approval
- Product should be installed per provided installation instructions
- ANSI/SPRI/FM 4435/ES-1 Test Pressure up to 275 psf.

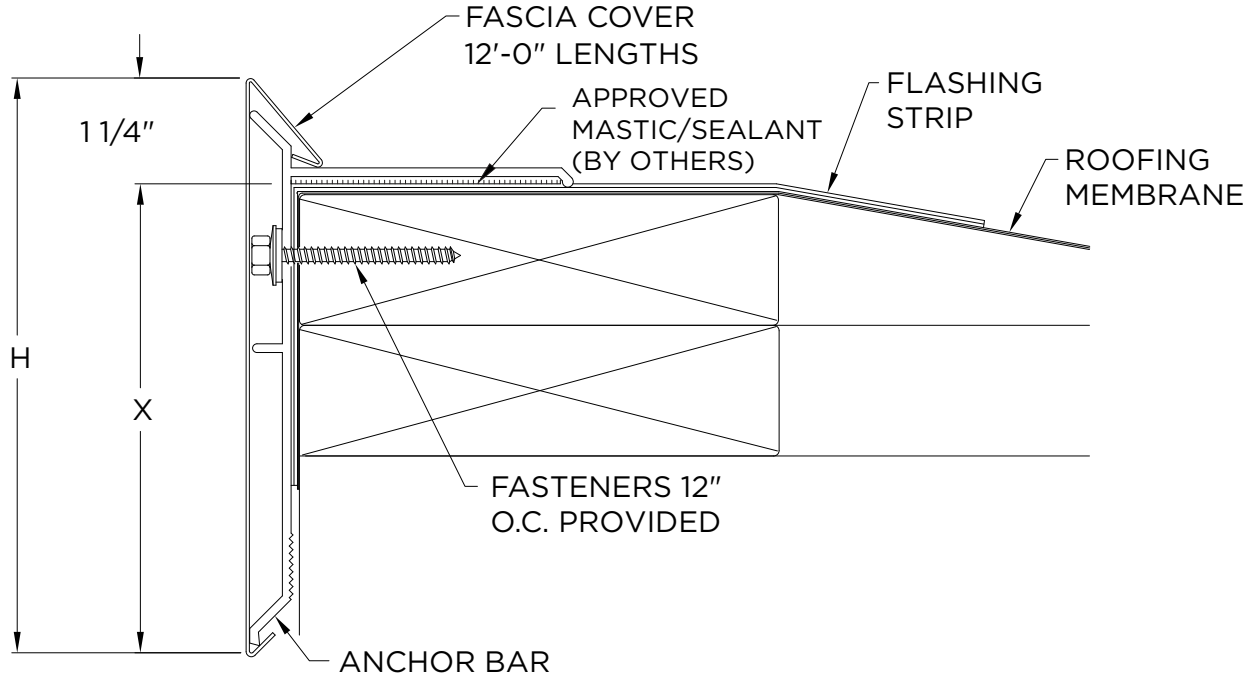

## APPROVALS



**ANSI/SPRI/FM 4435/ES-1**  
 Test Pressures listed in notes

## PROJECT INFO

Project Name: \_\_\_\_\_

Architect: \_\_\_\_\_

Roofing Contractor: \_\_\_\_\_

### Project Type:

By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All products will be installed in strict accordance with printed instructions.

Date: \_\_\_\_\_

### Polyglass USA, Inc.

1111 W. Newport Center Dr.  
 Deerfield Beach, FL 33442  
 Customer Service: 800-222-9782  
 Technical Service: 866-794-9659

SHT# 1 of 1

DATE: 01/10/22

DRN BY: JJC

CKD BY: MM

DWG #: 45010-17199

REV: C

## DIMENSIONS

PRODUCT ID. NO.	H DIM	X DIM	NAILER COVERAGE
<input type="checkbox"/> AFM-55	5 1/2"	4 1/4"	1 NAILER
<input type="checkbox"/> AFM-70	7"	5 3/4"	2 NAILERS
<input type="checkbox"/> AFM-85	8 1/2"	7 1/4"	4 NAILERS

## MATERIAL

- 24 Ga. Galv. Steel      Color: \_\_\_\_\_
- 22 Ga. Galv. Steel      Finish: \_\_\_\_\_
- .040" Aluminum
- Substrate:**  Wood  
If substrate is not given, wood fasteners will be provided.  Masonry  
 Metal
- OTHER: \_\_\_\_\_

## QUANTITIES

- \_\_\_\_\_ Lineal Feet (12'-0" Lengths)      \_\_\_\_\_ Right Endwall Flashing
- \_\_\_\_\_ Outside Miter (90°)      \_\_\_\_\_ Left Endwall Flashing
- \_\_\_\_\_ Inside Miter (90°)
- \_\_\_\_\_ Right Endcaps
- \_\_\_\_\_ Left Endcaps
- \_\_\_\_\_ Overflow Scupper  
 Style A  
 Style B
- \_\_\_\_\_ Spillout Scupper  
 Style A  
 Style B
- \_\_\_\_\_ Downspout Scupper  
 Style A     Style B  
 Size \_\_\_\_\_ x \_\_\_\_\_  
 Style A=Tapered 1.5" Drop | Style B=Flat