


SECUREDGE 200 WELDED RADIUS DRIP EDGE

WITH CONTINUOUS CLEAT

PROVIDING A RADIUS
THE RADIUS MAY BE PROVIDED
IN ONE OF TWO METHODS:


1.) THE ACTUAL KNOWN RADIUS IS



OR

2.) FIELD CONDITION MEASUREMENTS


NOTE: REFER TO ATTACHED WORKSHEET
FOR FURTHER INFORMATION

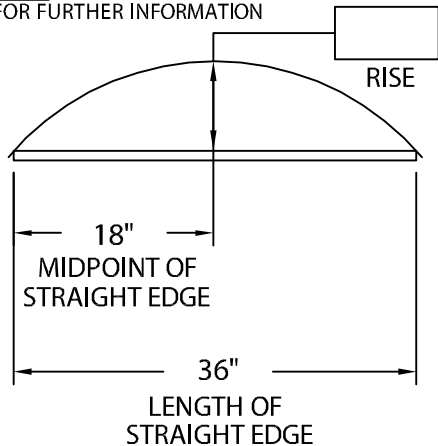

NOTE: CHECK MEASUREMENTS ALONG ENTIRE RADIUS.

DETAIL A

IMPORTANT!!! MUST INDICATE PROPER RADIUS CONDITION BY
CIRCLING APPROPRIATE OUTSIDE FACE

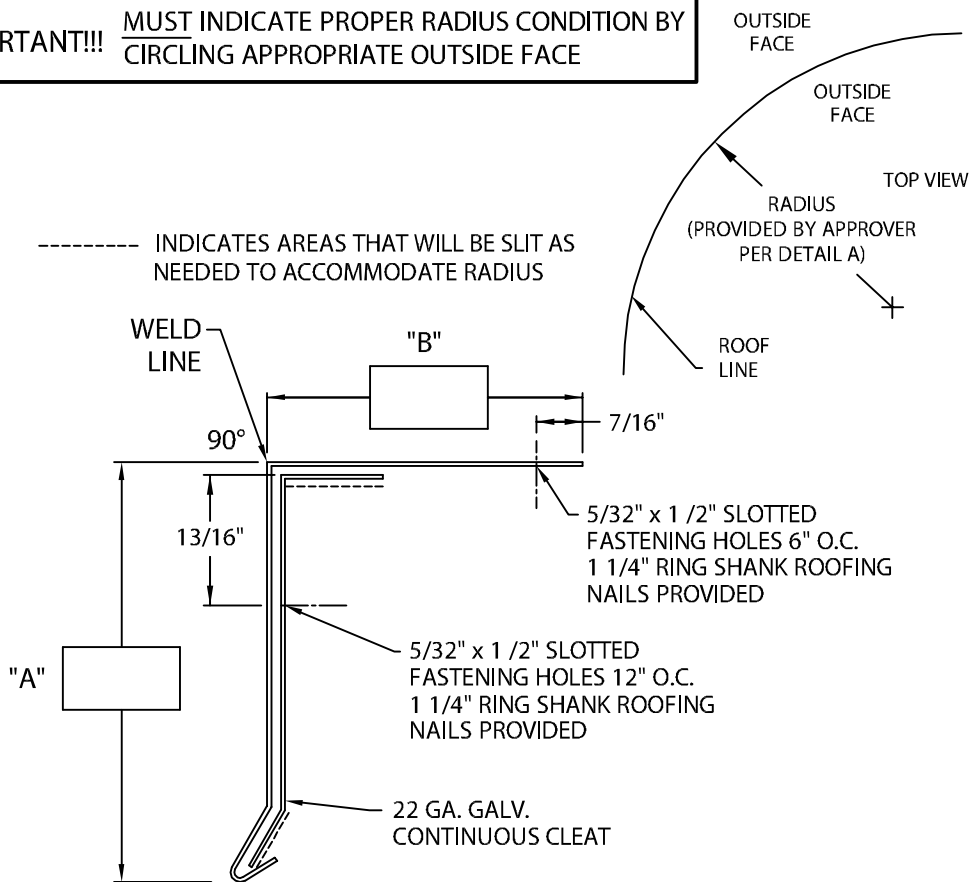

NOTES: -- 6" (152 mm) wide concealed splice plates provided.

-- Concealed splice plate must be field caulked to prevent water entry.

Fabrication will proceed only after receipt of signed print approval.

Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with Carlisle SynTec, Inc.'s printed instructions.

Approved by: _____

Date: _____

MATERIAL:

Flange - .080 (2.03 mm) Alum.

Face - .063" (1.60 mm) Alum.

Color: _____

Finish: _____

QUANTITIES:

_____ Lineal Feet (4'-0" (1.22 m) Lengths)

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

Customer Service

866-458-3537

(Metal-Era)



DATE: 04/07/17

DRN BY: JJC

CKD BY: SAK

SHT.# ___ OF ___

DWG# 15010-4700

E