



FLEXLOCK FLE RADIUS ROOF EDGE

FULLY ADHERED OR MECHANICALLY ATTACHED SINGLE-PLY VERSION

IMPORTANT!!! MUST INDICATE PROPER RADIUS CONDITION BY CIRCLING APPROPRIATE OUTSIDE FACE

PROVIDING A RADIUS
THE RADIUS MAY BE PROVIDED
IN ONE OF TWO METHODS:


1.) THE ACTUAL KNOWN RADIUS IS

' FEET " INCHES

OR

2.) FIELD CONDITION MEASUREMENTS

NOTE: REFER TO ATTACHED WORKSHEET
FOR FURTHER INFORMATION

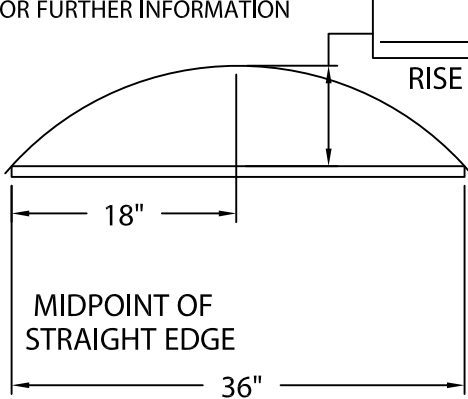

MINIMUM OF 2'-6"
(CALL IF LESS)
* RADIUS PRODUCT NOT
REQUIRED IF OVER 100'-0"

MAXIMUM OF 6"
(CALL IF MORE)
* RADIUS PRODUCT NOT
REQUIRED IF UNDER 5/32"

OUTSIDE FACE

ROOF LINE

RADIUS
(PROVIDED BY APPROVER
PER DETAIL A)

TOP
VIEW

--- INDICATES AREAS THAT WILL BE SLIT AS
NEEDED TO ACCOMODATE RADIUS

FASCIA COVER WILL
BE PROVIDED IN 6'-0"
OR 12'-0" LENGTHS,
DEPENDING ON
RADIUS CONDITION

RADIUS EXTRUDED BAR
PROVIDED IN 12'-0" LENGTHS,
EITHER SLIT OR ROLLED,
DEPENDING ON RADIUS
CONDITION

LENGTH OF
STRAIGHT EDGE

NOTE: CHECK MEASUREMENTS ALONG ENTIRE RADIUS.

DETAIL A

FLEXLOCK FLE RADIUS ROOF EDGE DIMENSIONS

PRODUCT ID. NO.	H DIM.	X DIM.	COVERAGE
<input type="checkbox"/> AF-40	4"	2 3/4"	1 NAILER
<input type="checkbox"/> AF-55	5 1/2"	4 1/4"	2 NAILERS
<input type="checkbox"/> AF-70	7"	5 3/4"	3 NAILERS
<input type="checkbox"/> AF-85	8 1/2"	7 1/4"	4 NAILERS

Fabrication will proceed only after receipt of signed print approval.

Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with Flex's printed instructions.

Approved by: _____

Date: _____

MATERIAL:

___ 24 Ga. Galv. Steel
___ .040" Aluminum
___ OTHER _____

Color: _____

Finish: _____

QUANTITIES:

_____ Lineal Feet (12'-0" Lengths)

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

Customer Service:

Phone: 800-969-0108

Fax: 610-916-9501



DATE: 03/23/17

DRN BY: JAB

CKD BY: SAK

SHT.# ___ OF ___

DWG# 28010-3439

F