


DOW EXTENDED CANTED FASCIA

GALVANIZED WATERDAM VERSION

ANSI/SPRI ES-1 DESIGN PRESSURE OF 190 psf

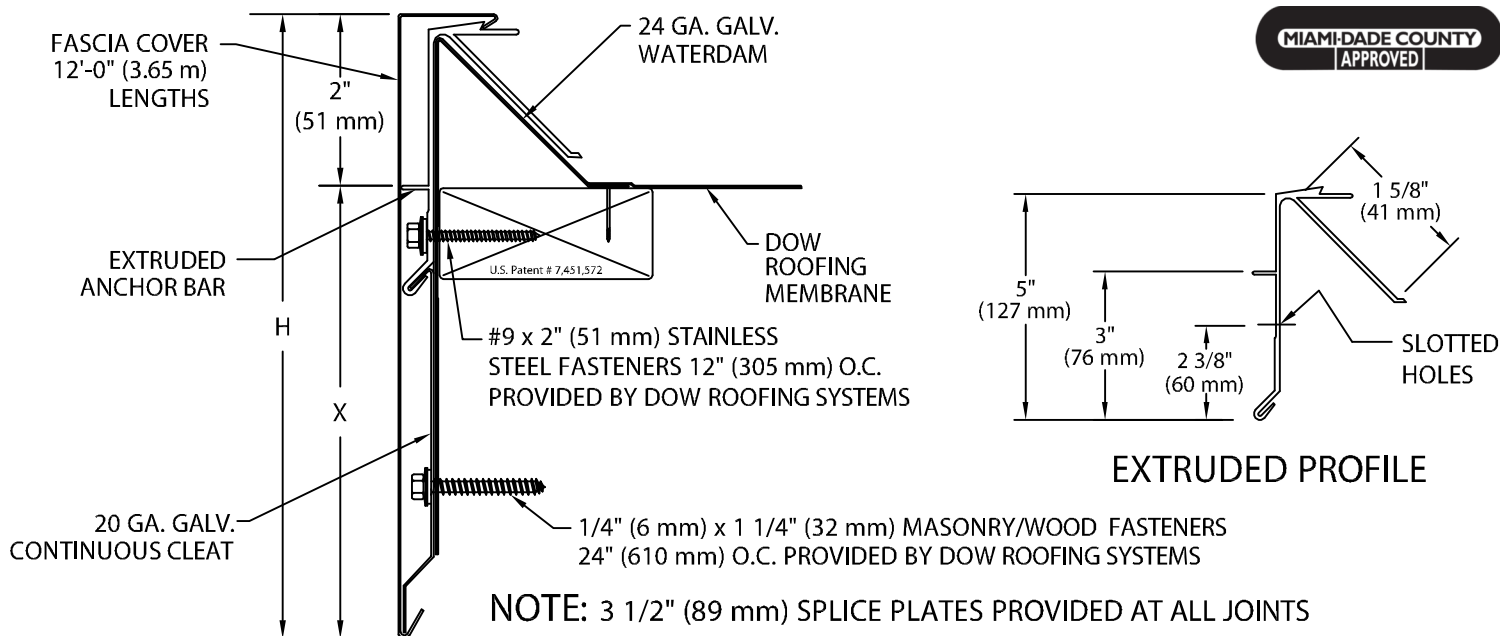

Fascia is to be installed per Specifications and Dow Roofing Systems' Installation Instructions Dwg. # 12110-2947

DOW EXTENDED CANTED FASCIA DIMENSIONS

NOA NO. 08-0604.02
MIAMI-DADE COUNTY, FLORIDA
12/11/13

PRODUCT ID. NO.	H DIM	X DIM
<input type="checkbox"/> AEFC-S902	9" (229 mm)	7" (178 mm)
<input type="checkbox"/> AEFC-S1052	10 1/2" (267 mm)	8 1/2" (216 mm)
<input type="checkbox"/> AEFC-S1202	12" (305 mm)	10" (254 mm)
<input type="checkbox"/> AEFC-S1352	13 1/2" (343 mm)	11 1/2" (292 mm)

Fabrication will proceed only after receipt of signed print approval.

Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with Dow Roofing Systems' printed instructions.

Approved by: _____

Date: _____

Unless otherwise specified 24 ga. galv. waterdam provided.

☐ by Dow Roofing Systems ☐ by Contractor

MATERIAL:

____ .050" (1.27 mm) Aluminum

____ .063" (1.60 mm) Aluminum

____ OTHER _____

Color: _____

Finish: _____

QUANTITIES:

_____ Lineal Feet (12'-0" (3.65 m) Lengths)

_____ Outside Miters @ (____°)

_____ Inside Miters @ (____°)

_____ Overflow Scupper Style____A____B

_____ Spillout Scupper Style____A____B

_____ Downspout Scupper Style____A____B

(____X____) Size A: Tapered 1 1/2" (38 mm) Drop
B: Flat

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

Corporate Offices
Dow Roofing Systems
Nine Sullivan Road
Holyoke, MA 01040
P: 800-621-ROOF

DATE: 03/02/12

DRN BY: JJC

CKD BY: SAK

SHT.# ____ OF ____

DWG# 12010-2948

I



ROOFING SYSTEMS