FLEXLOCK FASCIA EXTENDER
WITH OFFSET

1 1/4"
(32 mm)

7/16"
(11 mm)

PRE-SLOTTED HOLES
12" (305 mm) O.C.

1/8" (3 mm)
OFFSET

7/16"
(11 mm)

PRE-SLOTTED HOLES
12" (305 mm) O.C.

SPECIFY
DIMENSION

2 1/2"
(64 mm)
STD. OR

CONTINUOUS 22 GA. (0.81 mm)
GALV. CLEAT (INCLUDED)
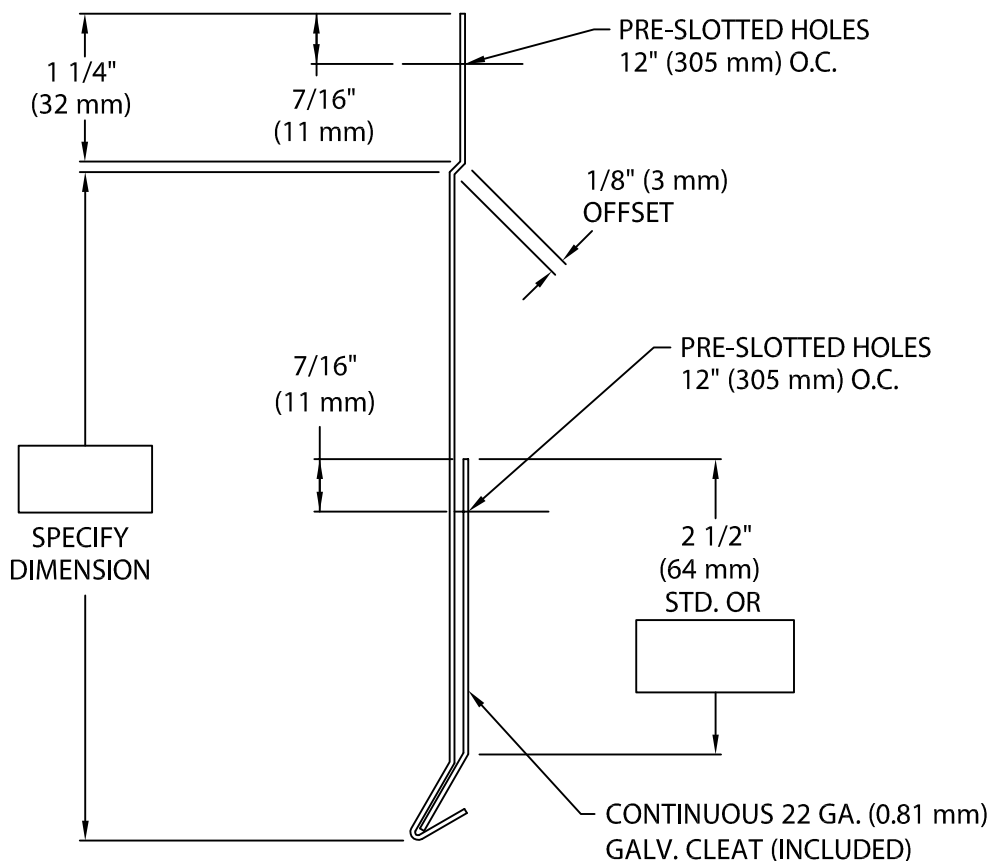
* PROVIDED WITH 3 1/2" (89 mm) CONCEALED SPLICE PLATE ONLY DUE TO MATERIAL THICKNESS.

NOTE: -- Unless otherwise noted, fabrication of miters and accessories are furnished standard.

-- Welded Miters and Accessories
Check one ☐ Required (surcharge) ☐ Not applicable

Fabrication will proceed only after receipt of signed print approval.

Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with Flex's printed instructions.

Approved by: _____

Date: _____

MATERIAL:

___ 24 Ga. (.65 mm) Galv.
___ .040" (1.01 mm) Alum.   Color:_____
___ .050" (1.27 mm) Alum.*
___ .063" (1.60 mm) Alum.*   Finish:_____
___ OTHER _____

QUANTITIES: ☐ Lap Joint   ☐ Splice Plates

_____ Lineal Feet 12'-0" (3.65 m) Lengths

_____ Outside Miters @ (_____°)

_____ Inside Miters @ (_____°)

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

Flex™

Customer Service:
Phone: 800-969-0108
Fax: 610-916-9501

DATE: 12/10/10

SHT.#____ OF ____

DRN BY: JJC

CKD BY: SAK

DWG# 28014-3561

D