


GENFLEX DOUBLE TAPERED COPING

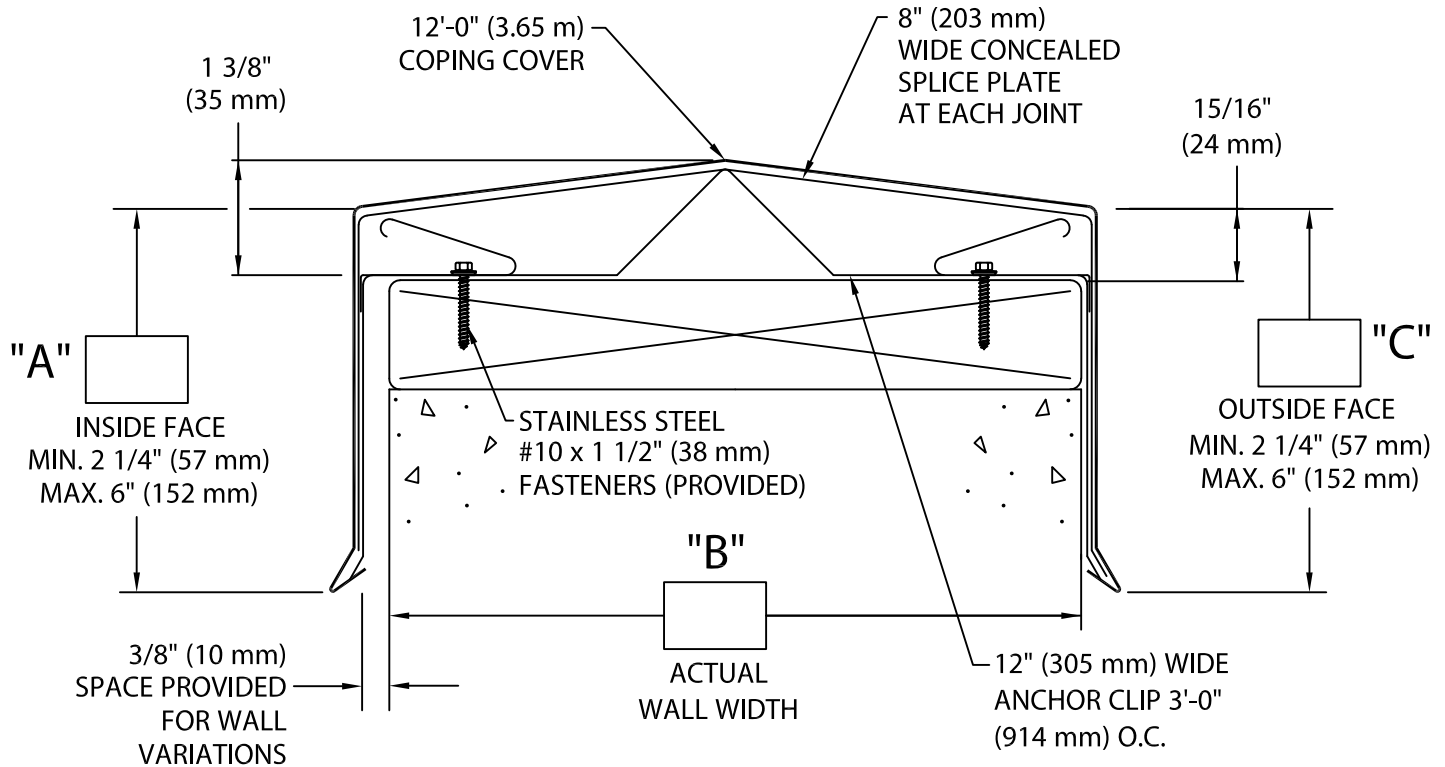

-- Concealed splice plates are provided with factory applied dual non-curing sealant strips.
-- Unless otherwise noted, fabrication of miters and accessories are furnished standard utilizing a non-penetrating quicklock joint, then factory sealed watertight.

Fabrication will proceed only after receipt of signed print approval.

Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with GenFlex's printed instructions.

Approved by: _____

Date: _____

-- Welded Miters and Accessories

Check one ☐ Required (surcharge) ☐ Not applicable

MATERIAL:

___ 24 Ga. (0.65 mm) Galv.

___ .040" (1.01 mm) Alum. Color: _____

___ .050" (1.27 mm) Alum.

___ .063" (1.60 mm) Alum. Finish: _____

___ OTHER _____

QUANTITIES:

_____ Lineal Feet 12'-0" (3.65 m) Lengths

_____ Outside Miters @ (_____)°

_____ Inside Miters @ (_____)°

_____ Right End Caps

_____ Left End Caps

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

Customer Service

Phone: 800-588-2162

Fax: 800-373-9156

www.metalera.com/genflex

GENFLEX

DATE: 02/19/21

DRN BY: JJC

CKD BY: MM

SHT.# ____ OF ____

DWG# 22011-4338

F