



INSIDE "T" MITERS

PERMA-TITE DOUBLE TAPERED COPING VERSION

RIGHT INSIDE "T" MITER

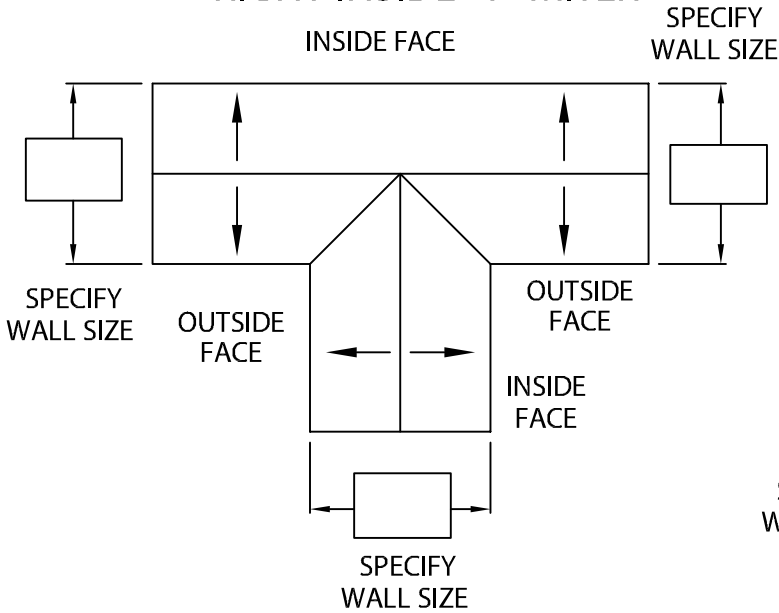

LEFT INSIDE "T" MITER

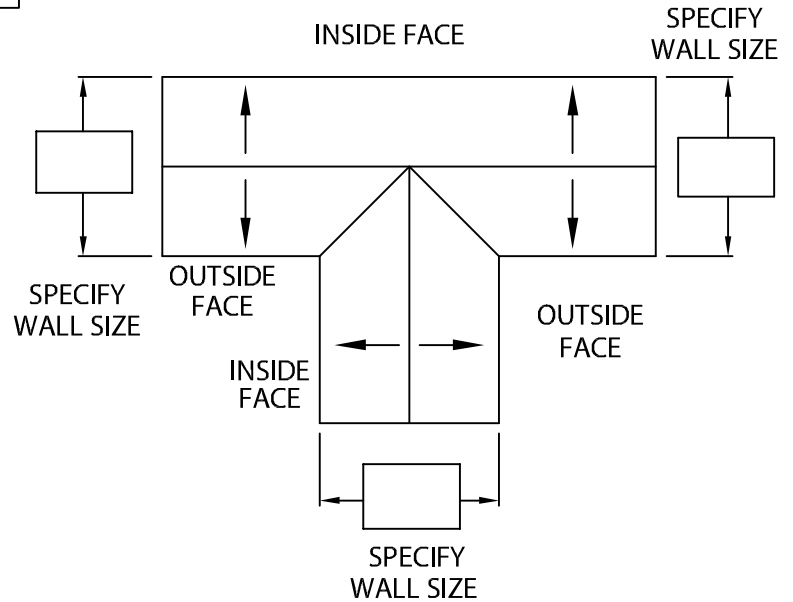

NOTES: -- Concealed splice plates are provided with factory applied dual non-curing sealant strips.

-- Unless otherwise noted, fabrication of miters and accessories are furnished standard utilizing a non-penetrating "Quicklock" joint, then factory sealed watertight.

Fabrication will proceed only after receipt of signed print approval.

Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with Metal-Era's printed instructions.

Approved by: _____

Date: _____

-- Welded Miters and Accessories

Check one Required (surcharge) Not applicable

MATERIALS:

___ 24 GA. (.65 mm) Steel

___ .040" (1.01 mm) Alum. Color: _____

___ .050" (1.27 mm) Alum.

___ .063" (1.60 mm) Alum. Finish: _____

___ Other _____

QUANTITIES:

_____ Right Inside "T"

_____ Left Inside "T"

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

Corporate Offices, Manufacturing
1600 Airport Road; Waukesha, WI 53188
Phone: 800-558-2162
Fax: 800-373-9156
www.metalera.com



DATE: 07/22/08

DRN BY: JJC

CKD BY: SAK

SHT.# ____ OF ____

DWG# 11011-8307

A