



NON 90° COPING MITERS

OUTSIDE MITER - OBTUSE

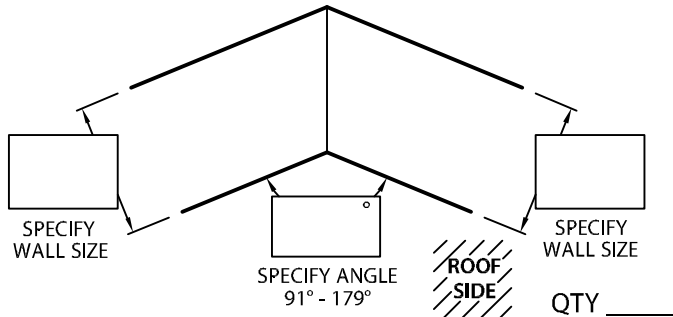


OUTSIDE MITER - ACUTE

INTERNAL USE

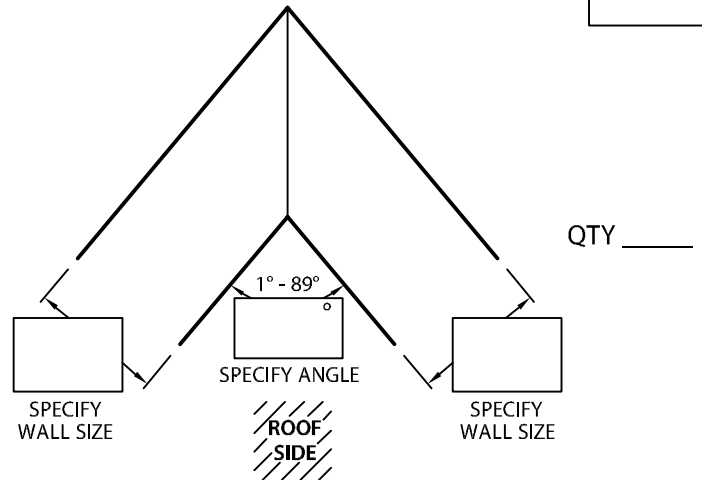


INSIDE MITER - OBTUSE

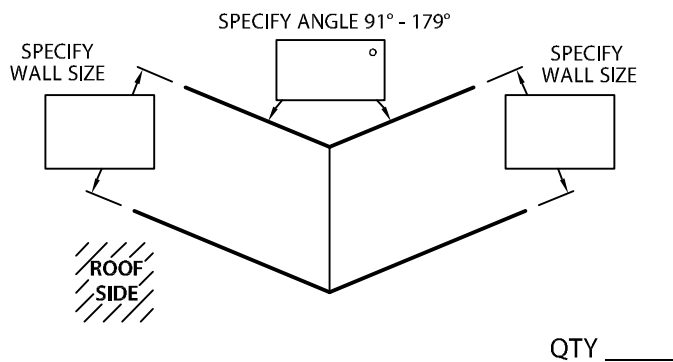

INSIDE MITER - ACUTE

INTERNAL USE

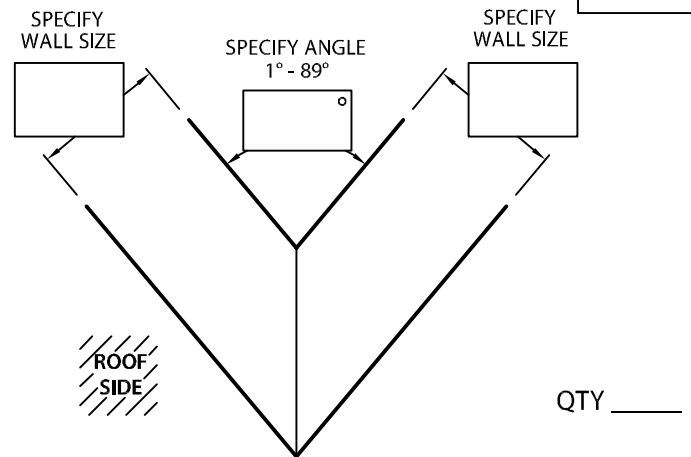

NOTES:

— FOR CUSTOM LEG LENGTHS MODIFY DRAWING ABOVE.

- ① WELDED ACCESSORIES REQUIRE A MINIMUM MATERIAL THICKNESS OF .050".

MATERIAL:

___ 24 GA. GALVANIZED STEEL
___ 22 GA. GALVANIZED STEEL
___ .040" ALUMINUM
___ .050" ALUMINUM
___ .063" ALUMINUM
___ OTHER _____

SPECIFY ACCESSORY TYPE:

- ☐ WELDED ①
☐ QUICKLOCK

COLOR: _____

FINISH: _____

AUTHORIZED SIGNATURE: _____

APPROVED BY: _____

DATE: _____

PROJECT: _____

ARCHITECT: _____

ROOFING CONTRACTOR: _____

REPRESENTATIVE/DISTRIBUTOR: _____

CUSTOMER SERVICE
PHONE 800-969-0108
FAX 610-916-9501

Flex™

DATE: 10/19/16

DRN BY: JJC

CKD BY: SAK

SHT.# 1 OF 2


DWG# 28011-3471

E



NON 90° COPING MITERS

RIGHT ANGLES ARE 90°
ACUTE ANGLES RANGE FROM 1° - 89°
OBTUSE ANGLES RANGE FROM 91° - 179°

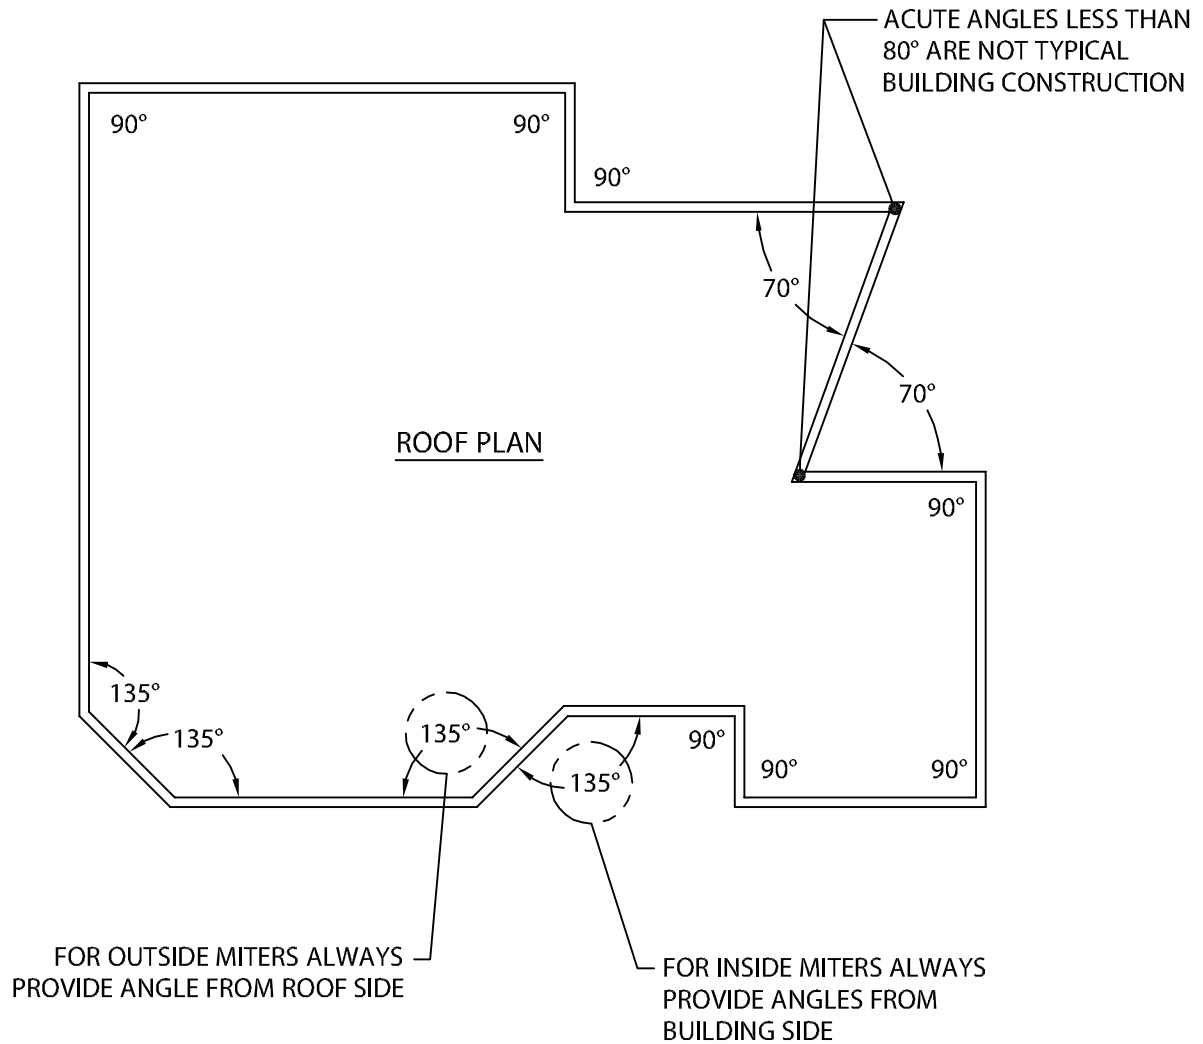

CUSTOMER SERVICE
PHONE: 800-969-0108
FAX: 610-916-9501

DATE: 10/19/16
DRN BY: JJC
CKD BY: SAK

SHT.# 2 OF 2
DWG# 28011-3471

E