




SECUREDGE 1000 FASCIA

FULLY ADHERED OR MECHANICALLY ATTACHED SINGLE-PLY VERSION

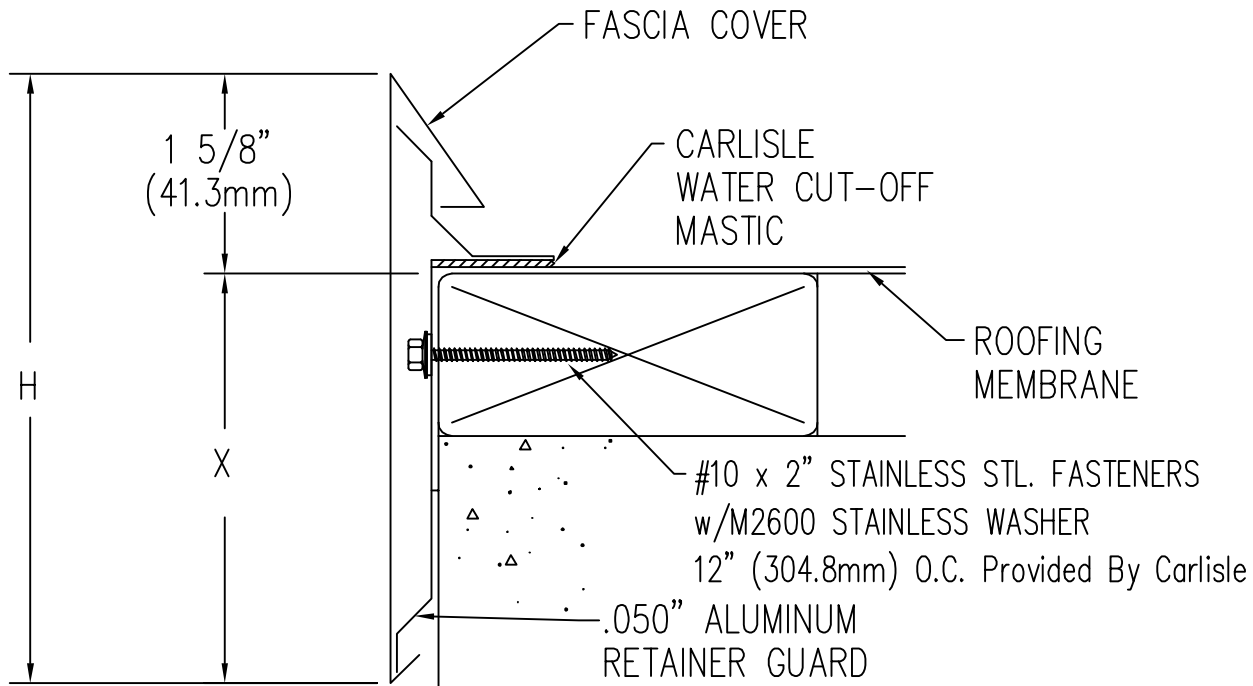

Fascia is to be installed per Specifications and Carlisle's Installation Instructions Dwg. # 15110-1650

Securedge 1000 Fascia Dimensions

| PRODUCT ID. NO. | H DIM | X DIM | NAILER COVERAGE |
|-------------------------------|-------------------|-------------------|-----------------|
| <input type="checkbox"/> 1040 | 4" (101.6 mm) | 2 3/8" (60.3 mm) | 1 NAILER |
| <input type="checkbox"/> 1055 | 5 1/2" (139.7 mm) | 3 7/8" (98.4 mm) | 2 NAILERS |
| <input type="checkbox"/> 1070 | 7" (177.8 mm) | 5 3/8" (136.5 mm) | 3 NAILERS |

Fabrication will proceed only after receipt of signed print approval.

Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with Carlisle SynTec, Inc.'s printed instructions.

Approved by: _____

Date: _____

MATERIAL:

____ 24 Ga. (.65 mm) Galv. Steel
____ .040" (1.01 mm) Aluminum
____ OTHER _____

Color: _____

Finish: _____

QUANTITIES:

____ Lineal Feet 12'-0"
(3.65m) Lengths

____ Outside Miters @ (____)'

____ Inside Miters @ (____)'

____ Overflow Scupper Style ____ A ____ B

____ Spillout Scupper Style ____ A ____ B

____ Downspout Scupper Style ____ A ____ B

(____X____) Size A: Tapered 1 1/2" Drop
B: Flat

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

Customer Service
866-458-3537
(Metal-Era)



DATE: 03/05/15

DRN BY: JJC

CKD BY: SAK

SHT.# ____ OF ____

DWG# 15010-1651

B