



FLEXLOCK FLE-HG RADIUS ROOF EDGE

BUILT-UP OR MODIFIED VERSION

IMPORTANT!!! MUST INDICATE PROPER RADIUS CONDITION BY CIRCLING APPROPRIATE OUTSIDE FACE

PROVIDING A RADIUS
THE RADIUS MAY BE PROVIDED
IN ONE OF TWO METHODS:


1.) THE ACTUAL KNOWN RADIUS IS

_____ ' FEET _____ " INCHES

OR

2.) FIELD CONDITION MEASUREMENTS

NOTE: REFER TO ATTACHED WORKSHEET
FOR FURTHER INFORMATION

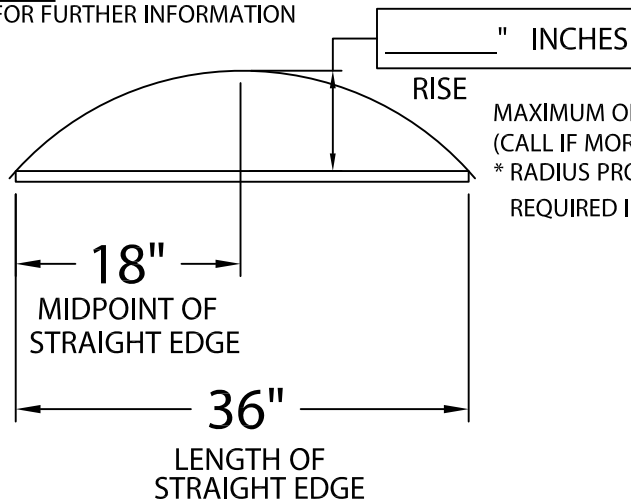


NOTE: CHECK MEASUREMENTS ALONG ENTIRE RADIUS.

DETAIL A

MINIMUM OF 4'-6"
(CALL IF LESS)

* RADIUS PRODUCT NOT REQUIRED IF
OVER 200'-0"

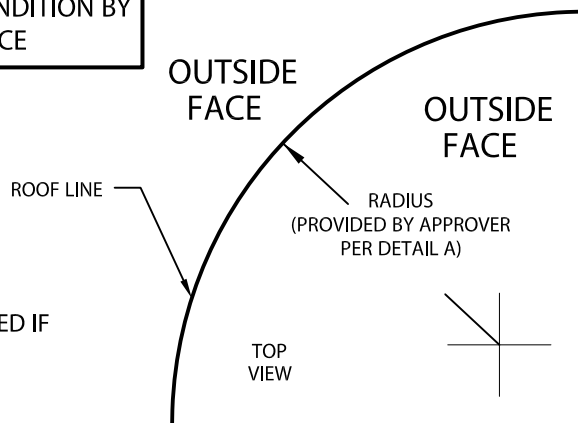

----- INDICATES AREAS THAT WILL BE SLIT AS
NEEDED TO ACCOMODATE RADIUS

* RADIUS FASCIA PROVIDED
IN 4'-0" LENGTHS IF RADIUS
IS LESS THAN 48'-0".

* RADIUS FASCIA PROVIDED
IN 12'-0" LENGTHS IF
RADIUS IS 48'-0" OR
GREATER.

FLANGE WELDED WHEN RADIUS IS
LESS THAN 48'-0"

* RADIUS EXTRUDED BAR PROVIDED
IN 4'-0" LENGTHS IF RADIUS IS LESS
THAN 48'-0".

* RADIUS EXTRUDED BAR PROVIDED
IN 12'-0" LENGTHS IF RADIUS IS
48'-0" OR GREATER.

FLEXLOCK FLE-HG RADIUS ROOF EDGE DIMENSIONS

PRODUCT ID. NO.	H DIM.	X DIM.	COVERAGE
<input type="checkbox"/> HG-AFM-55	5 1/2"	4 1/4"	2 NAILERS
<input type="checkbox"/> HG-AFM-70	7"	5 3/4"	3 NAILERS

Fabrication will proceed only after receipt of
signed print approval.

Print Approval:

Architect and/or contractor shall verify all
dimensions, sizes and quantities. All
products to be installed in strict accordance
with Flex's printed instructions.

Approved by: _____

Date: _____

MATERIAL:

____ 24 GA. GALVANIZED STEEL COLOR: _____
____ 22 GA. GALVANIZED STEEL FINISH: _____
____ .040" ALUMINUM
____ .050" ALUMINUM
____ .063" ALUMINUM
____ OTHER _____

QUANTITIES:

_____ LINEAL FEET 12'-0" LENGTHS

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

Customer Service:

Phone: 800-969-0108

Fax: 610-916-9501



DATE: 11/15/19

DRN BY: JJC

CKD BY: JAI

SHT.# ____ OF ____

DWG# 28010-11792

E