




SECUREDGE B*2000 FASCIA

STONE BALLAST SINGLE-PLY VERSION

ANSI/SPRI ES-1 DESIGN PRESSURE OF 290 psf

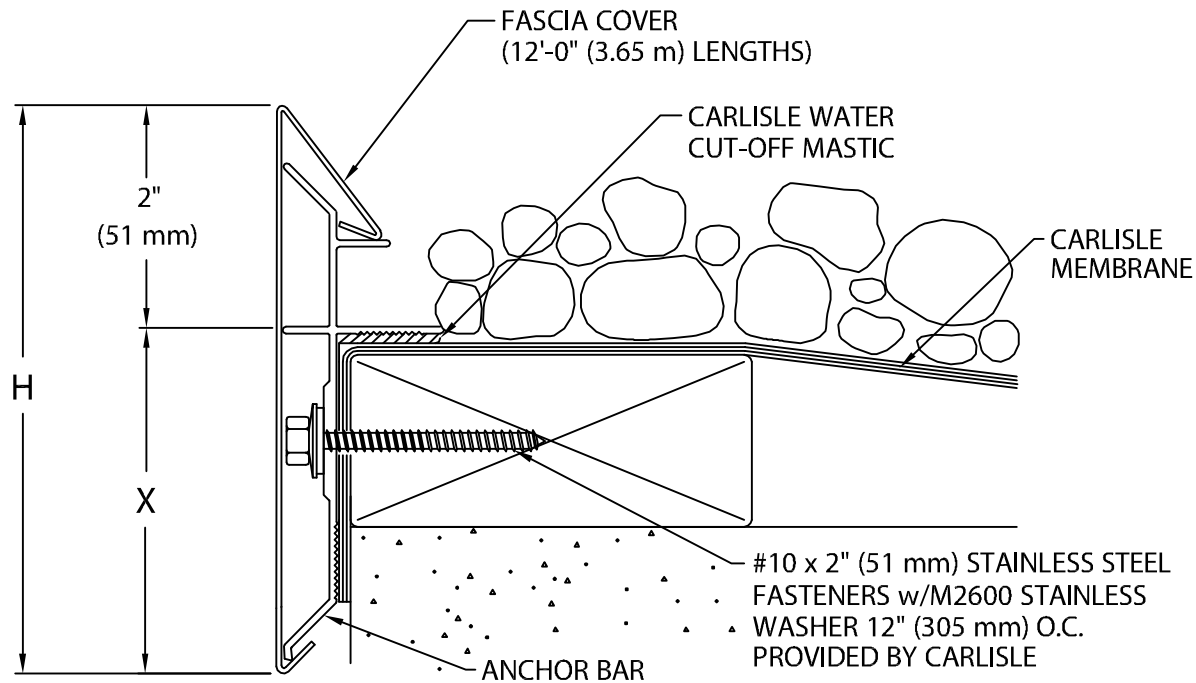

Fascia is to be installed per Specifications and Carlisle's Installation Instructions Dwg. # 15110-1629

SECUREDGE B*2000 FASCIA DIMENSIONS

PRODUCT ID. NO.	H DIM	X DIM	NAILER COVERAGE
<input type="checkbox"/> B*2050	5" (127 mm)	3" (76 mm)	1 NAILER
<input type="checkbox"/> B*2065	6 1/2" (165 mm)	4 1/2" (114 mm)	2 NAILERS
<input type="checkbox"/> B*2080	8" (191 mm)	6" (152 mm)	3 NAILERS

Fabrication will proceed only after receipt of signed print approval.

Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with Carlisle SynTec, Inc.'s printed instructions.

Approved by: _____

Date: _____

MATERIAL:

____ 24 Ga. (.65 mm) Galv. Steel

____ .040" (1.01 mm) Aluminum

____ OTHER _____

Color: _____

Finish: _____

QUANTITIES:

____ Lineal Feet 12'-0" (3.65 m) Lengths

____ Outside Miters @ (____)°

____ Inside Miters @ (____)°

____ Overflow Scupper Style ____A____B

____ Spillout Scupper Style ____A____B

____ Downspout Scupper Style ____A____B

(____X____) Size A: Tapered 1 1/2" (38 mm) Drop
B: Flat

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

Customer Service
866-458-3537
(Metal-Era)



DATE: 03/05/15

DRN BY: JJC

CKD BY: SAK

SHT.# ____ OF ____

DWG# 15010-1630

D