7/16"

SPECIFY DIMENSION

7/16"
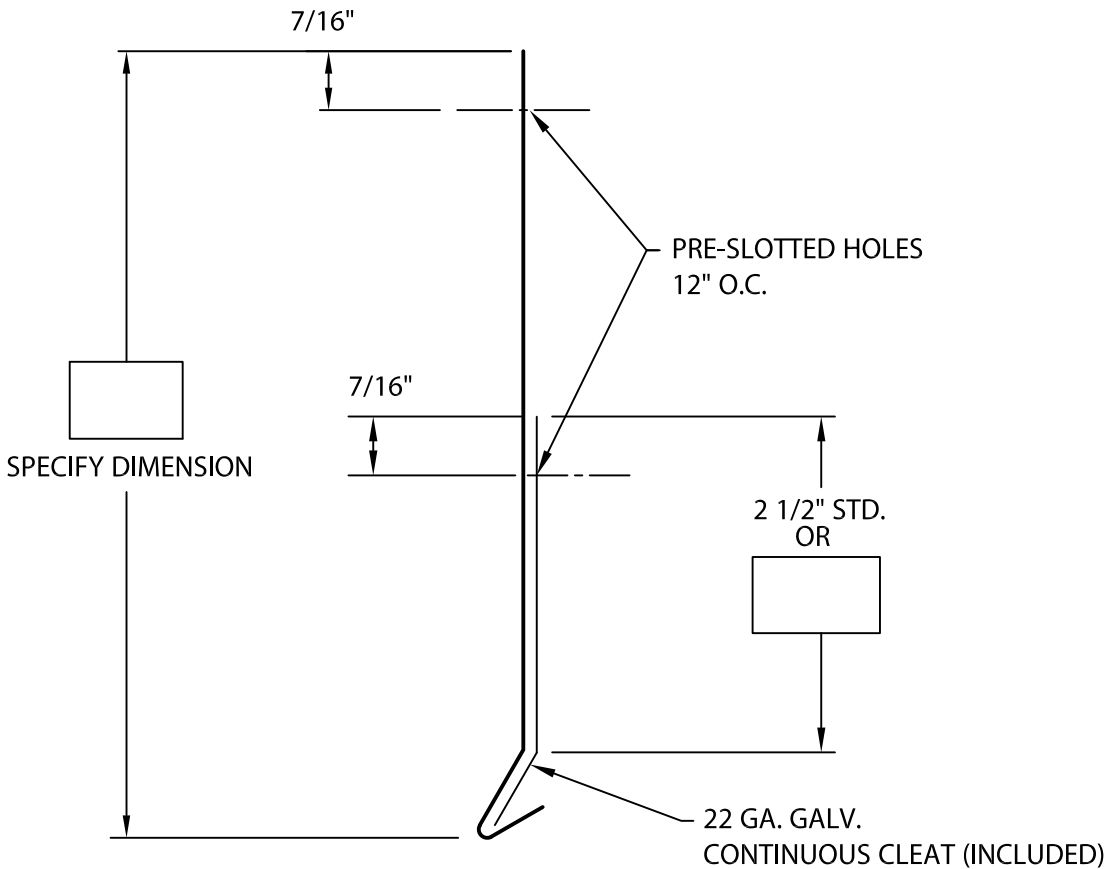
PRE-SLOTTED HOLES
12" O.C.

2 1/2" STD.
OR

22 GA. GALV.
CONTINUOUS CLEAT (INCLUDED)

✳ PROVIDED WITH 3½" WIDE CONCEALED SPLICE PLATES DUE TO MATERIAL THICKNESS

NOTE: -- UNLESS OTHERWISE NOTED, FABRICATION OF MITERS AND ACCESSORIES ARE FURNISHED STANDARD.

Fabrication will proceed only after receipt of signed print approval.

Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with Carlisle SynTec, Inc.'s printed instructions.

Approved by: _____

Date: _____

-- WELDED MITERS AND ACCESSORIES
CHECK ONE ☐ REQUIRED (SURCHARGE ☐ NOT APPLICABLE

MATERIAL:

___ 24 GA. GALVANIZED STEEL
___ 22 GA. GALVANIZED STEEL
___ .040" ALUMINUM   COLOR:_____
___ .050" ALUMINUM ✳
___ .063" ALUMINUM ✳   FINISH:_____
___ OTHER _____

QUANTITIES: ☐ LAP JOINT   ☐ SPLICE PLATES

_____ LINEAL FEET 12'-0" LENGTHS
_____ OUTSIDE MITER(S) @ 90°
_____ INSIDE MITER(S) @ 90°
FOR NON-90° MITERS SEE PRINT APPROVAL #15010-1625

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

CARLISLE
SYNTEC SYSTEMS

Customer Service
866-458-3537
(Metal-Era)

DATE: 11/06/18	SHT.#___ OF ___
DRN BY: JJC	
CKD BY: SAK	DWG# 15014-1706	B