




FIBERTITE WR GUTTER  
BOX

FM DESIGN

\*NOTES

- Bottom sizes are provided in 1/2" increments
- Maximum downspout dimension not to exceed "B" minus 9/16"
- Roof flange is optional. If flange size is not provided, the gutter will not include a roof flange. If flange angle not provided, the gutter will have a 90-degree flange.
- Pop rivets provided
- Unless otherwise noted, fabrication of miters and accessories are provided with a non- penetrating quicklock joint, then factory sealed watertight
- Welded accessories require minimum material thickness of .050 aluminum.
- For non-90 miters, see separate print approval
- Product should be installed per provided installation instructions
- ANSI/SPRI/GT-1 test pressures up to 596 psf (Horizontal), 224 psf (Vertical), 160 plf (Downward)

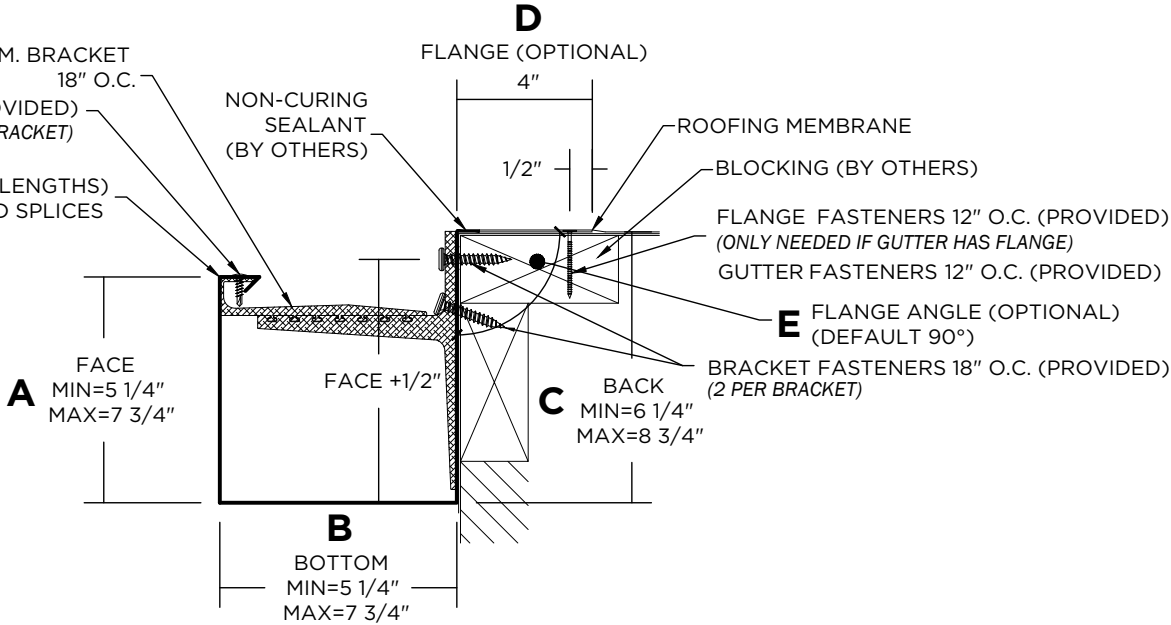

APPROVALS\*



ANSI/SPRI/GT-1  
Test Pressures listed in notes

PROJECT INFO

Project Name: \_\_\_\_\_

Architect: \_\_\_\_\_

Roofing Contractor: \_\_\_\_\_

Project Type:

☐ By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All products will be installed in strict accordance with printed instructions.

Date: \_\_\_\_\_

FiberTite  
Customer Service  
1-800-355-6416

SHT# \_\_\_\_\_ of \_\_\_\_\_

DATE: **06/03/25**

DRN BY: **MLM**

CKD BY: **MM**

DWG #: **23012-44777**

REV: **A**

DIMENSIONS

| SELECT SIZE              | A (FACE) | B (BOTTOM) | C (BACK) | FLANGE (OPTIONAL)                                                                                                                                                                                                                                                                                                                      |
|--------------------------|----------|------------|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <input type="checkbox"/> | 5 1/4"   | 5 1/4"     | 6 1/4"   | <b>D (FLANGE)</b> PLEASE SELECT ONE:<br>WITH FLANGE <input type="checkbox"/> WITHOUT FLANGE <input type="checkbox"/><br><small>NOTE: IF NEITHER BOX IS CHECKED, THE GUTTER WILL BE PROVIDED <b>WITHOUT</b> A ROOF FLANGE</small><br><b>E (FLANGE ANGLE)</b><br><small>NOTE: IF ANGLE IS NOT PROVIDED, FLANGE WILL BE 90°</small> _____ |
| <input type="checkbox"/> | 5 3/4"   | 5 3/4"     | 6 3/4"   |                                                                                                                                                                                                                                                                                                                                        |
| <input type="checkbox"/> | 6 1/4"   | 6 1/4"     | 7 1/4"   |                                                                                                                                                                                                                                                                                                                                        |
| <input type="checkbox"/> | 6 3/4"   | 6 3/4"     | 7 3/4"   |                                                                                                                                                                                                                                                                                                                                        |
| <input type="checkbox"/> | 7 1/4"   | 7 1/4"     | 8 1/4"   |                                                                                                                                                                                                                                                                                                                                        |
| <input type="checkbox"/> | 7 3/4"   | 7 3/4"     | 8 3/4"   |                                                                                                                                                                                                                                                                                                                                        |

MATERIAL

- ☐ 24 Ga. Galv. Steel  
☐ 22 Ga. Galv. Steel  
☐ .040" Aluminum  
☐ .050" Aluminum  
☐ .063" Aluminum  
☐ OTHER: \_\_\_\_\_

Color: \_\_\_\_\_

Finish: \_\_\_\_\_

Substrate:

If substrate is not given, wood fasteners will be provided.

- ☐ Wood  
☐ Masonry  
☐ Metal

Accessory Type\*: ☐ Quicklock (Default) ☐ Welded (Surcharge)

QUANTITIES



- \_\_\_\_\_ Lineal Feet (12'-0" Lengths)  
\_\_\_\_\_ Outside Miter (90°)  
\_\_\_\_\_ Inside Miter (90°)  
\_\_\_\_\_ Right Endcaps  
\_\_\_\_\_ Left Endcaps  
\_\_\_\_\_ Expansion Joints (If Required)




# FIBERTITE WR GUTTER

## BOX STANDARD ACCESSORIES


# FM DESIGN

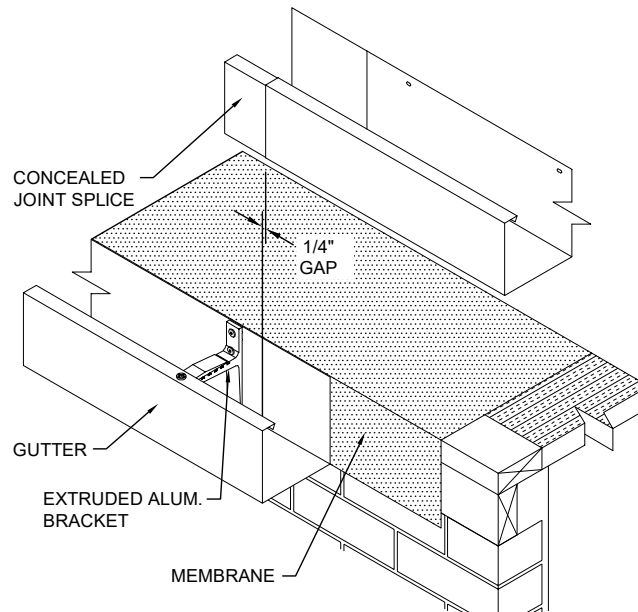


**END CAP**  
LEFT HAND SHOWN

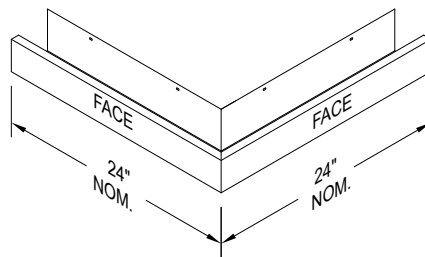

**OUTSIDE MITER**

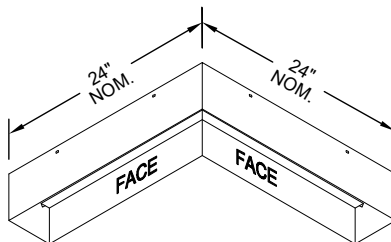

**INSIDE MITER**

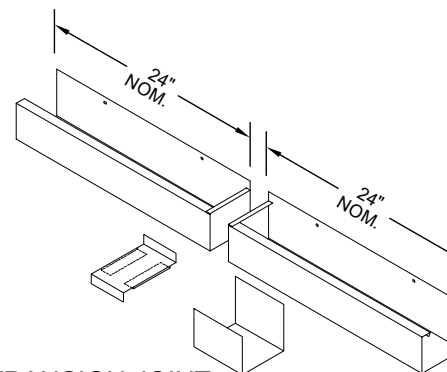

**EXPANSION JOINT**  
(IF REQUIRED)

Standard gutter miter leg lengths are 24" Nominal  
Standard gutter miter angle is 90°  
For special miter requirements, attach sketches or consult manufacturer for assistance.

**FiberTite**  
Customer Service  
1-800-355-6416

SHT# \_\_\_\_ of \_\_\_\_

DATE: **06/03/25**

DRN BY: **MLM**

CKD BY: **MM**

DWG #: **23012-44777**

REV: **A**