

DOW INDUSTRIAL COPING

IG-B VERSION

FLANGE LGTH.

OPTIONAL
GUTTER FLANGE


PRESLOTTED HOLES IN GUTTER STRAP
#9 x 2" (51 mm) STAINLESS STEEL
FASTENERS (PROVIDED)

GUTTER STRAP
@ 30" O.C. (INCLUDED)

SPECIFY
FLANGE ANGLE

OPTIONAL
SUPPORT BRACKET

5/32" x (4 mm) 1/2"
(13 mm) HOLES @
12" O.C. GALV. ROOFING
NAILS (PROVIDED)

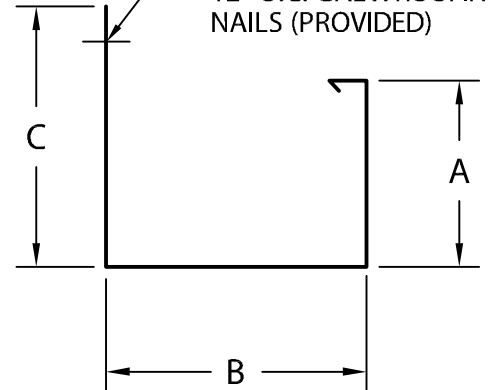

PRODUCT ID #	C	B	A	STRAP
<input type="checkbox"/> IGB-C6	6"	4 1/8"	4 1/2"	1 1/4" X .100 Mill
<input type="checkbox"/> IGB-C7	7"	6"	6"	1 1/4" X .100 Mill
<input type="checkbox"/> IGB-C8	8"	7"	7"	2" X .100 Mill
<input type="checkbox"/> IGB-C9	9"	8"	8"	2" X .100 Mill

NOTES: A) Maximum downspout dimension not to exceed "B" minus 3/4".

B) 2" lap joint provided.

C) 24 ga. steel, .040" miters are riveted.

D) .050" & .063" miters are welded.

MATERIAL:

Color: _____

Finish: _____

___ 24 Ga. (.65 mm) Galv.
___ .040" (1.01 mm) Alum.
___ .050" (1.27 mm) Alum.
___ .063" (1.60 mm) Alum.
___ OTHER _____

Fabrication will proceed only after receipt of signed print approval.

Print Approval:

Architect and/or contractor shall verify all dimensions, sizes, and quantities. All products to be installed in strict accordance with Dow Roofing Systems' printed instructions.

Approved by: _____

Date: _____

QUANTITIES:

_____ Lineal Feet (12'-0" (3.65 m) Lengths)

_____ Outside Miters (____°)

_____ Inside Miters (____°)

_____ End Caps: Right _____ Left _____

_____ Expansion Joints

Style "1" _____ Style "2" _____

(For Support Brackets See Print Approval # 12012-4049)

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

Customer Service
800-558-2162
(Metal-Era)



DATE: 03/05/12

DRN BY: JJC

CKD BY: SAK

SHT.# _____ OF _____

DWG# 12012-4041

F