



PRESTO-TITE INSTANT FASCIA

FULLY ADHERED OR MECHANICALLY ATTACHED SINGLE-PLY VERSION

* NOTES

- Fascia cover provided with splice plates
- 3.5" face height only available in 24 ga. galv steel and .040" aluminum
- Face heights 9.25" and over only available in 22 ga. galv steel or .050" aluminum
- Pre-drill with 3/16" in. drill for masonry conditions
- Product cannot be installed on conditions smaller than 5 ft. radius
- For non-90 miters, see separate print approval
- Product should be installed per provided installation instructions
- ANSI/SPRI/FM 4435/ES-1 Test Pressure up to 381 psf

APPROVALS



ANSI/SPRI/FM 4435/ES-1
Test Pressures listed in notes

PROJECT INFO

Project Name: _____

Architect: _____

Roofing Contractor: _____

Project Type: _____

☐ By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All products will be installed in strict accordance with printed instructions.

Date: _____

Johns Manville

EdgeMetal@jvm.com
Main JM Switchboard USA:
303-978-2000

Technical: 800-922-5922 Option 3
Account Specialists: 877-766-3295
General Product Information
Center: 800-654-3103

SHT# _____ of _____


DATE: **05/28/24**

DRN BY: **PL**

CKD BY: **MM**

DWG #: **16010-36912**

REV: **C**

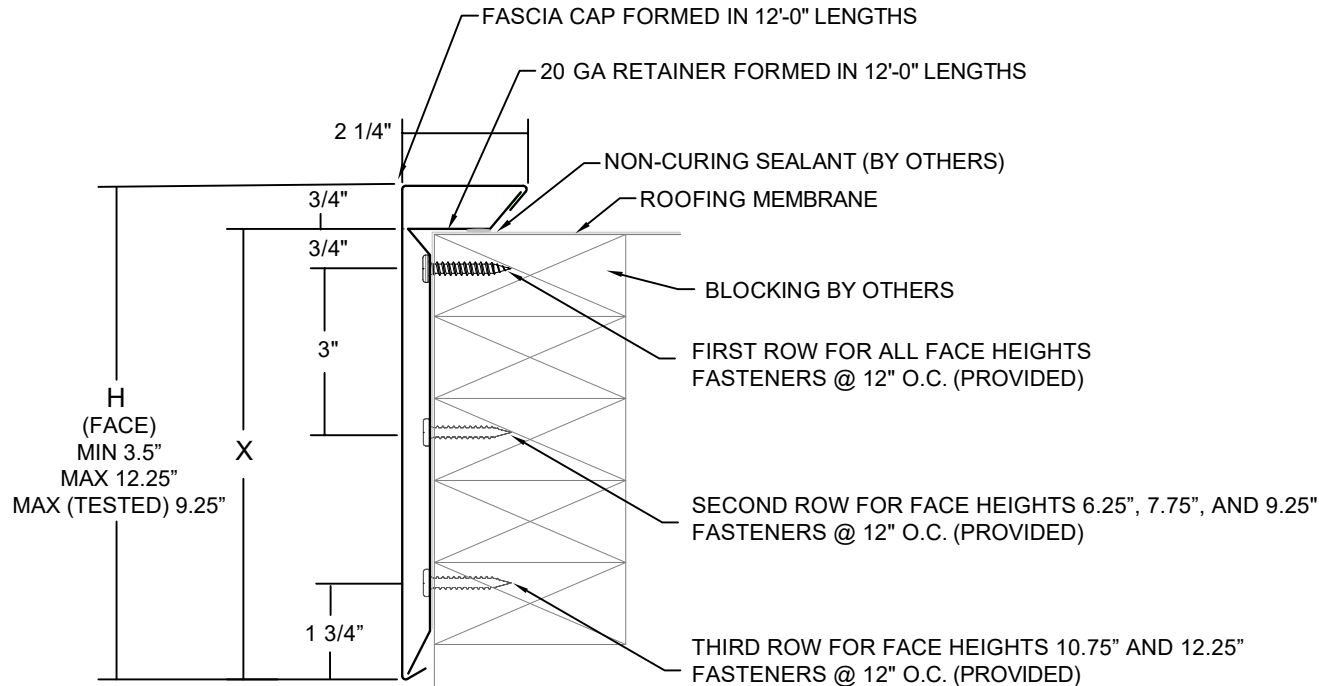

DIMENSIONS

| PRODUCT ID. NO. | H DIM | X DIM | NAILER COVERAGE |
|-----------------------------------|---------|---------|-----------------|
| <input type="checkbox"/> TE-350* | 3 1/2" | 2 3/4" | 1 NAILER |
| <input type="checkbox"/> TE-475 | 4 3/4" | 4" | 2 NAILERS |
| <input type="checkbox"/> TE-625 | 6 1/4" | 5 1/2" | 3 NAILERS |
| <input type="checkbox"/> TE-775 | 7 3/4" | 7" | 4 NAILERS |
| <input type="checkbox"/> TE-925* | 9 1/4" | 8 1/2" | 5 NAILERS |
| <input type="checkbox"/> TE-1075* | 10 3/4" | 10" | 6 NAILERS |
| <input type="checkbox"/> TE-1225* | 12 1/4" | 11 1/2" | 7 NAILERS |

MATERIAL

- ☐ 24 Ga. Galv. Steel
- ☐ 22 Ga. Galv. Steel
- ☐ .040" Aluminum
- ☐ .050" Aluminum

Color: _____

Finish: _____

Substrate: ☐ Wood
If substrate is not given, wood fasteners will be provided. ☐ Masonry
☐ Metal

☐ OTHER: _____

QUANTITIES

_____ Straight Lineal Feet (12'-0" Lengths)

_____ Radius Lineal Feet (4'-0" Lengths)*

_____ Outside Miter (90°) (Cover Only)

_____ Inside Miter (90°) (Cover Only)

_____ Right Endcaps

_____ Left Endcaps

_____ Right Endwall Flashing

_____ Left Endwall Flashing

_____ Downspout Scupper

_____ Spillout Scupper