


SOPRA-EDGE SENTINEL® INSTANT FASCIA

FULLY ADHERED OR MECHANICALLY ATTACHED SINGLE-PLY VERSION

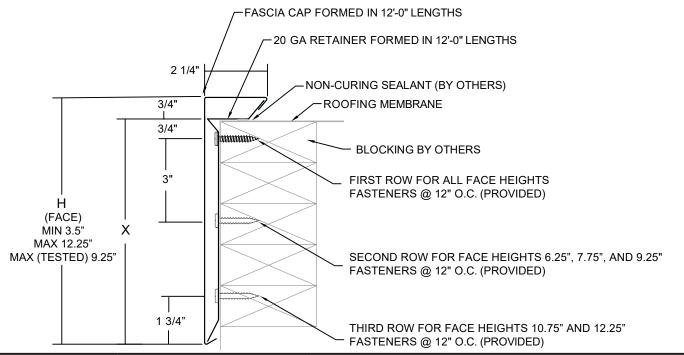

DIMENSIONS

PRODUCT ID. NO.	H DIM	X DIM	NAILER COVERAGE
☐ TE-350*	3 1/2"	2 3/4"	1 NAILER
☐ TE-475	4 3/4"	4"	2 NAILERS
☐ TE-625	6 1/4"	5 1/2"	3 NAILERS
☐ TE-775	7 3/4"	7"	4 NAILERS
☐ TE-925*	9 1/4"	8 1/2"	5 NAILERS
☐ TE-1075*	10 3/4"	10"	6 NAILERS
☐ TE-1225*	12 1/4"	11 1/2"	7 NAILERS

MATERIAL

☐ 24 Ga. Galv. Stee
22 Ga. Galv. Stee
□.040" Aluminum
☐.050" Aluminum

OTHER:

Color: _____ Finish:

Substrate: □ Wood ☐ Masonry given, wood fasteners will be provided. ☐ Metal

QUANTITIES

Straight Lineal Feet (12'-0" Lengths)

Radius Lineal Feet (4'-0" Lengths)*

Outside Miter (90°) (Cover Only)

Inside Miter (90°) (Cover Only)

Right Endcaps

Left Endcaps

Right Endwall Flashing

_____ Left Endwall Flashing

Downspout Scupper

Spillout Scupper

* NOTES

- Fascia cover provided with splice plates
- 3.5" face height only available in 24 ga. galv steel and .040" aluminum
- Face heights 9.25" and over only available in 22 ga. galv steel or .050" aluminum
- Pre-drill with 3/16" in. drill for masonry conditions
- Product cannot be installed on conditions smaller than 5 ft. radius
- For non-90 miters, see separate print approval
- Product should be installed per provided installation
- ANSI/SPRI/FM 4435/ES-1 Test Pressure up to 381

APPROVALS





ANSI/SPRI/FM 4435/ES-1

Test Pressures listed in notes

D	D	<u></u>		F	C	ΓΙ	N	П	F	\cap	
_	К	v	J		·		ľ	ı	Г,	J	

PROJECTIME	O
Project Name:	
Architect:	
Roofing Contractor:	
By selecting this box you confirmed that dimensionare correct. All	
products will be installed in strict accordance with printed instructions.	SHT# of

Date:	
CODDEMA	

SOPREMA

800-356-3521 www.soprema.us 310 Quadral Dr. Wadsworth, OH 44281 f: 330-334-6257

DATE:	05/28/24

DRN BY: PL

CKD BY:

DWG #: 33010-36919