


ELEVATE COPING

TAPERED

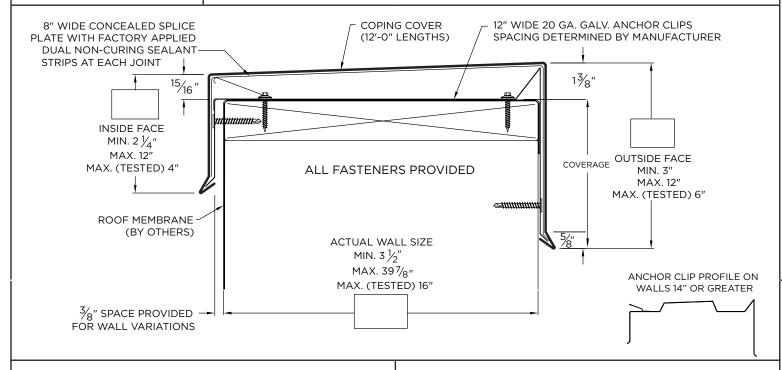

APPROVALS*

ANSI/SPRI/FM 4435/ES-1 Test Pressures listed in notes





MATERIAL*

- ☐ 24 Ga. Galv. Steel
- 22 Ga. Galv. Steel
- ☐.040" Aluminum
- ☐.050" Aluminum ☐.063" Aluminum
- □ OTHER: _____
- Substrate: (For Top Fasteners) If substrate is not
- given, wood fasteners ☐ Masonry will be provided.

Finish:

Color: _____

☐ Metal

□ Wood

QUANTITIES

Lineal Feet (12'-0" Lengths)

Outside Miter (90°)

Inside Miter (90°)

Right Endcaps

Left Endcaps

Accessory Type*: ☐ Quicklock (Default) ☐ Welded (Surcharge)

_____ Right Endwall Flashing (Coping Version)

Left Endwall Flashing (Coping Version)

Right Endwall Flashing (Splice Plate Version)

Left Endwall Flashing (Splice Plate Version)

* NOTES

- Oil canning can occur on larger face heights and wall widths; recommend 22 Ga.,.050" or .063" Aluminum for face height over 8" or wall width over 12".
- 24 Ga. and .040" Aluminum covers available for wall sizes 3.5" to 24" ONLY
- Unless otherwise noted, fabrication of miters and accessories are furnished standard utilizing a non-penetrating quicklock joint, then factory sealed watertight
- Welded accessories require a minimum material thickness of .050" Aluminum
- For non-90 miters, see separate print approval
- Product should be installed per provided installation instructions
- ANSI/SPRI/FM 4435/ES-1 test pressures up to 226 psf (Horizontal) and 391 psf (Vertical)

PROJECT INFO

Project Name:
Architect:
Roofing Contractor:

Project Type:

By selecting this box yo confirmed that dimensionare correct. All	ou have verified and ons, sizes, and quantities
products will be installed in strict	SHT# 1 of 2
accordance with	05/71/27

Elevate

Date:

26 Century Blvd. Suite 205 Nashville, TN 37214 Contact your local Elevate representative. DATE: **05/31/23**


JJC DRN BY: CKD BY: _

13011-19320 DWG #:




ELEVATE COPING

STANDARD ACCESSORIES

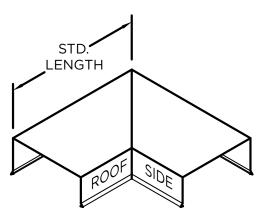



OUTSIDE MITER

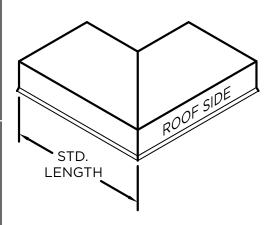


INSIDE MITER

MITER STANDARD LEG LENGTH: WALL SIZE + 9 \(\frac{5}{8}'' = LENGTH \)






ENDCAP (LEFT HAND SHOWN)



ENDWALL FLASHING COPING VERSION (RIGHT HAND SHOWN)



ENDWALL FLASHING SPLICE PLATE VERSION (RIGHT HAND SHOWN) (AVAILABLE ONLY IN .040" WELDED, PAINTED TO MATCH COPING)

NOTES

Additional accessories are available including:

- Transition Miters
- Straight Transition Miters
- "T" Miters
- "Z" Miters
- Step-up Miters
- Peak / Valley Miters
- Pilaster Caps
- Radius Coping
- Arched Coping

For additional accessory requirements, attach sketches or call manufacturer for assistance.

Elevate

26 Century Blvd. Suite 205 Nashville. TN 37214 Contact your local Elevate representative.

SHT# 2	of _ 2		
DATE: 05/31/23			
DRN BY:	JJC		
CKD BY:	MM		
DWG #: _	13011-19320		

REV: -